


MODEL FQCSDC10

- **COMBINER 4 CHANNELS**
- **TYPE STAR POINT**
- **FM BAND 87.5÷108 MHz**
- **BAND II**

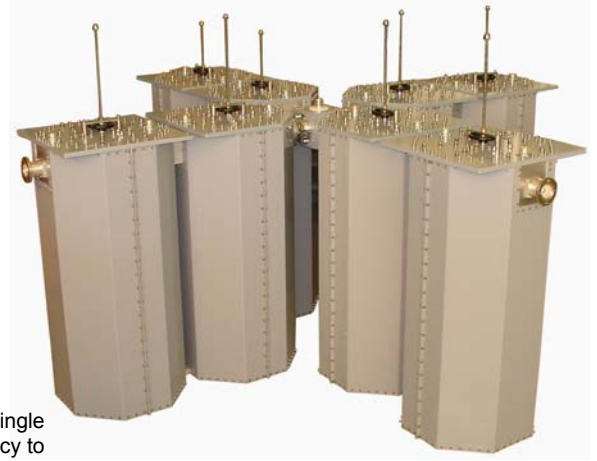


The star combiner basically consist of parallel connecting several transmitters to a single antenna system through suitable band pass filters, each on tuned transmitter frequency to witch it's connected.

The parallel connection is obtained by means of coaxial lines of determined length, so as provide for adequate isolation between transmitters.


TYPICAL SPECIFICATIONS	
Model	FQCSDC10 – Type STAR POINT
Impedance	50 Ohm
Frequency Range	87.5-108 MHz
VSWR ±150KHz	1.1:1max
Insertion Loss	at f_0 0.1 dB max
Return Loss ±150KHz	≤ -26dB
Isolation ±1.5MHz	≥ 30 dB
Input Number	4
Output Number	1
Connectors	Input 1+5/8" (Opt. 3+1/8") Output 3+1/8" (Opt. 4+1/2")
Max Power	10KW × 4 Channels
Working Temperature	-20°C ÷ +50°C
Colour	Enamel gray ral 7001
Materials	Aluminium, Brass, Copper, PTFE, Stainless Steel, Silvering (min 12µm thickness)

Features:

- Distortion – Free Transmission
- Star point system with double pass-band cavity filters (standard configurations)
- Star point system with triple pass-band cavity filters
- Star point system with pass stop
- Low loss, high isolation
- Natural convection
- Option Group delay equalizer

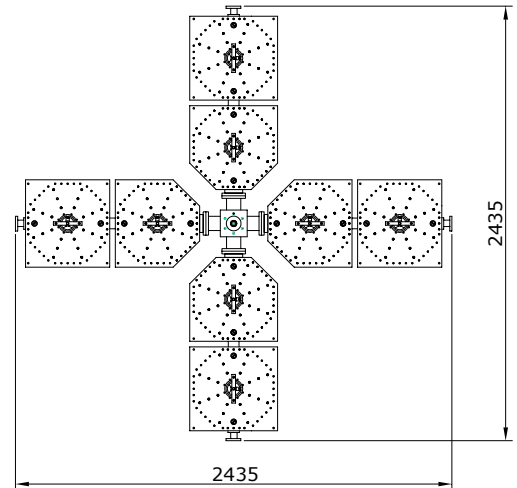

Dimensions	1400(Max size)×2435×2435 mm (55.1(Max size)×95.8×95.8 inch) (H×L×W)
Net Weight	≅ 240 Kg

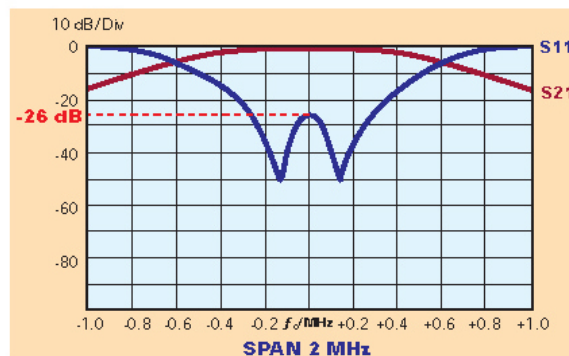

Typical shape of a curves for S11 and S12 parameters for single filter

“These specifications are subject to change without notice”