



PRODUCT CATALOG

Edition 01/12

RF COMPONENTS AND ACCESSORIES



INDEX

• Unflanged Elbows

7/8" Male - Male.....	2
1+5/8" Male - Male.....	3
1+5/8" Male - Female.....	4
1+5/8" Female - Female.....	5
3+1/8" Male - Male.....	6

• Flanged Elbows

7/8"	8
1+5/8"	9
3+1/8"	10

• Coaxial Adaptors

7/8" Female – 1+5/8" Male.....	12
7/8" Female – 4+1/2" Female.....	13
1+5/8" Female – N Female.....	14
1+5/8" Female – 7/16" Female.....	15
1+5/8" Female – 7/8" Female.....	16
1+5/8" Female – 4+1/2" Female.....	17
3+1/8" Female – "N" Female.....	18
3+1/8" Female – 7/16" Female.....	19
3+1/8" Female – 7/8" Female.....	20
3+1/8" Female – 1+5/8" Female.....	21
3+1/8" Female – 4+1/2" Female.....	22
4+1/2" Female – 6+1/8" Female.....	23

• Inners

7/8"	25
1+5/8"	26
3+1/8"	27
4+1/2"	28

• Coaxial Rigid Lines

7/8".....	30
1+5/8"	31
3+1/8"	32

• Centring for Rigid Lines

7/8".....	34
1+5/8"	35
3+1/8"	36
4+1/2"	37

• Flanges


7/8"	39
1+5/8"	40
3+1/8"	41
4+1/2"	42

• Directional Coupler	
1+5/8" (2 probes).....	44
3+1/8" (2 probes).....	46
4+1/2" (2 probes).....	49
• Accessories for Directional Couplers	
Digital Power Meter FM	51
Digital Power Meter TV	52
Digital Power Meter FM with panel	53
Digital Power Meter TV with panel	54
• Dummy Load	
150W	56
250W	57
5 KW FM air cooled	58
• Coaxial Switching Relay	
2-Way Coaxial Switching Relay, EIA 1+5/8" connectors.....	61
• Accessories for Coaxial Switching Relay	
Control Panel for coaxial relay.....	64
Fast by-pass Patch panel 1+5/8"	65
• Flanges to weld	
7/8".....	69
1+5/8".....	70
3+1/8".....	71
4+1/2".....	72
• Connectors for RF Cable	
7/8" EIA Flange for 1/2" foam cable.....	74
7/8" EIA Flange (90°) for 1/2" foam cable.....	75
7/8" EIA Flange for 7/8" foam cable.....	76
1+5/8" EIA Flange for 1"+5/8 foam cable.....	77
• Straight Adaptors	
3+1/8" Straight Adaptors (Coupling assembly with inner).....	79
• U-Link	
7/8"	81
1+5/8"	82
3+1/8"	83
4+1/2"	84
• Patch Panels	
7/8" six ports / three U-Links	86
1+5/8" four ports / two U-Links	87
1+5/8" five ports / two U-Links	88
1+5/8" six ports / three U-Links	89
3+1/8" four ports / two U-Links	90
3+1/8" eight ports / four U-Links	91
4+1/2" four ports / two U-Links	92

Unflanged Elbows


Unflanged Elbow

7/8" (male - male)

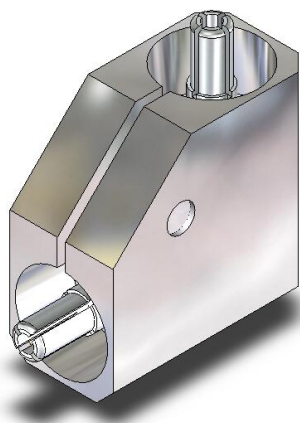


TECHNICAL DATA

Part Number	ADP7878RLAMM
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32 dB
Operating Temperature Range	-40 ÷ +70° C
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.11 Kg

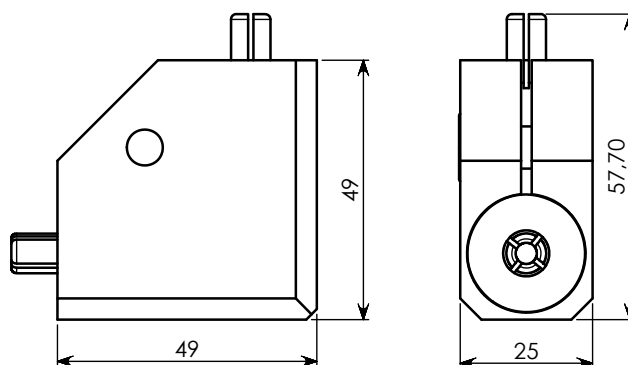


Unflanged Elbow

1+5/8" (male - male)

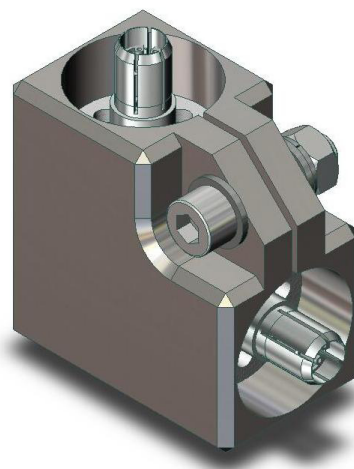


TECHNICAL DATA

Part Number	ADP5858RLAMM
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.62 Kg

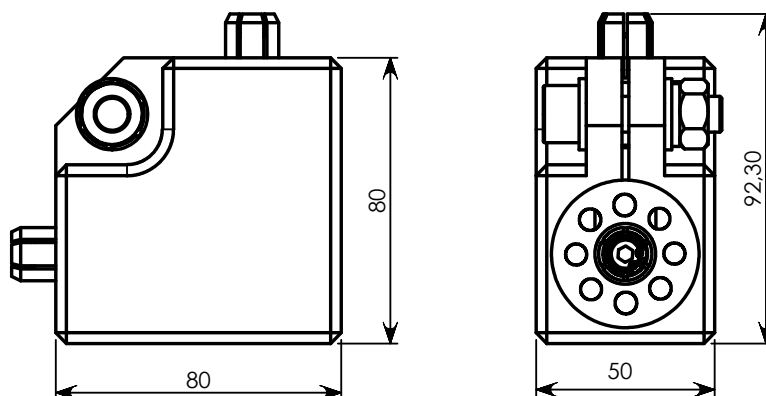


Unflanged Elbow

1+5/8" (male - female)

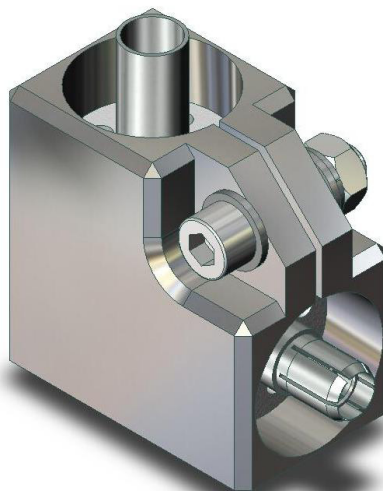


TECHNICAL DATA

Part Number	ADP5858RLAMF
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32 dB
Operating Temperature Range	-40 ÷ +70° C
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.62 Kg

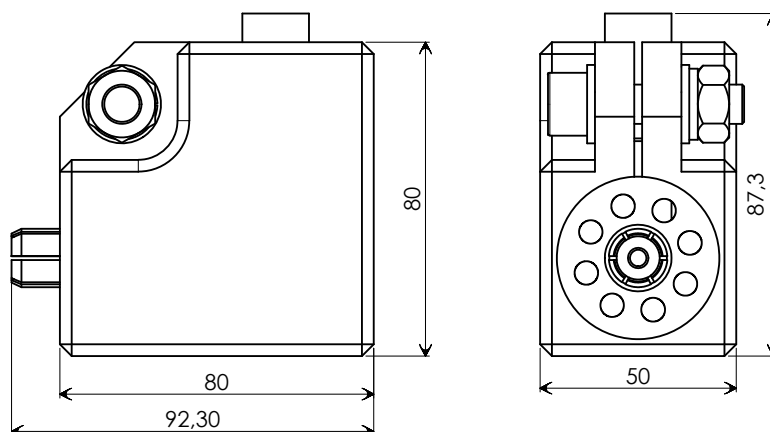


Unflanged Elbow

1+5/8" (female - female)

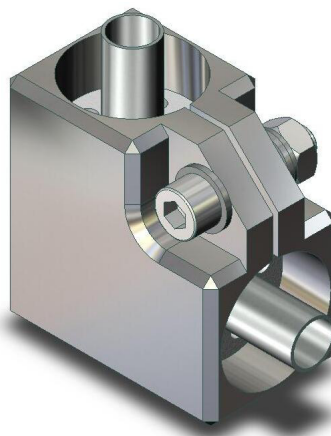


TECHNICAL DATA

Part Number	ADP5858RLAFF
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.62 Kg

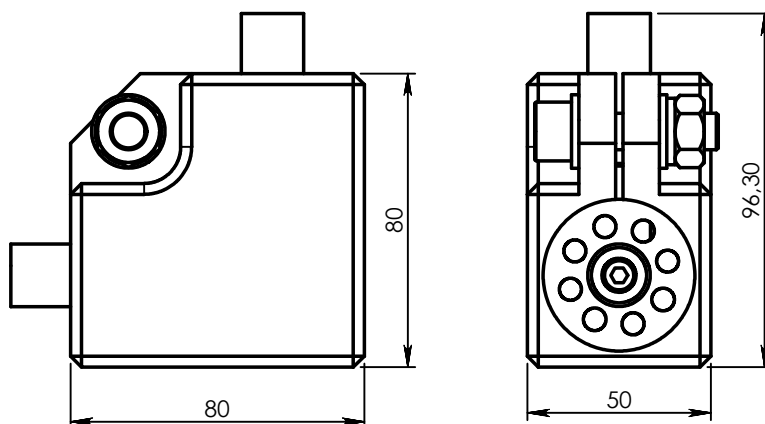


Unflanged Elbow

3+1/8" (male - male)

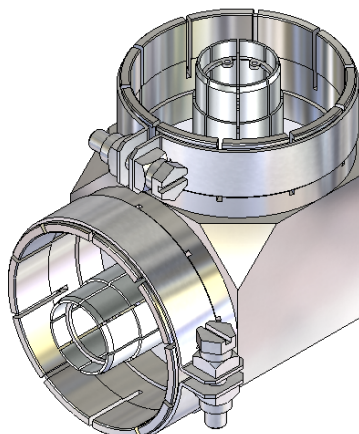

TECHNICAL DATA


Part Number	ADP318318RLA
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 1.54 Kg

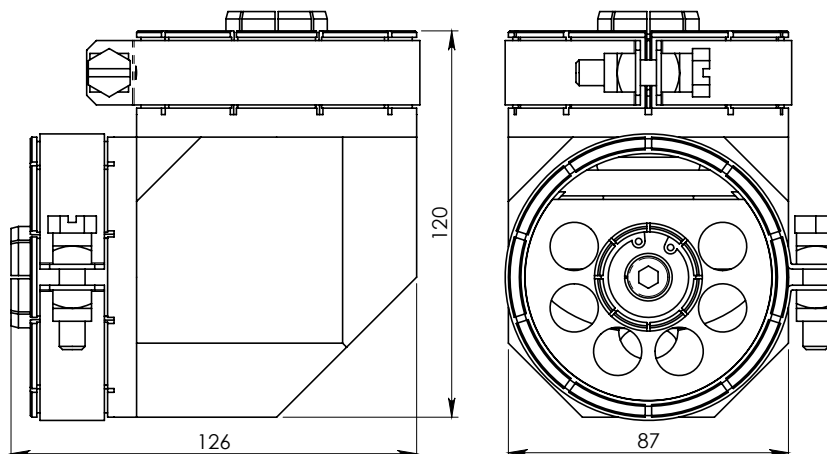

Flanged Elbows


Flanged Elbow

7/8"

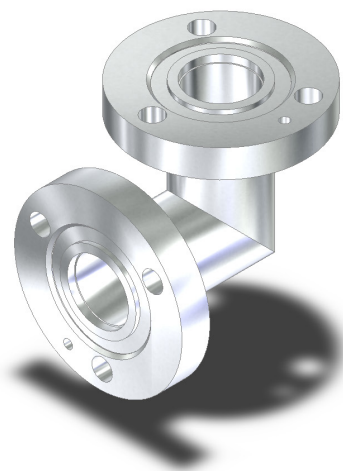


TECHNICAL DATA

Part Number	ADP88
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32 dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 0.47 Kg

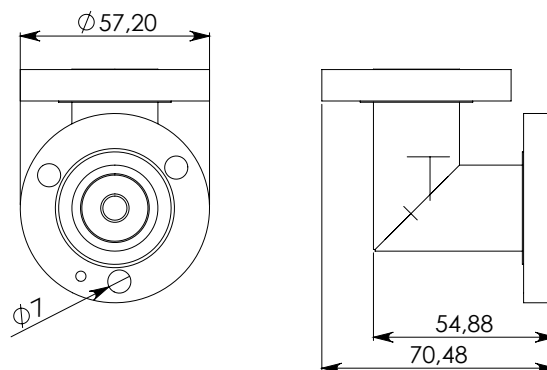


Flanged Elbow

1+5/8"

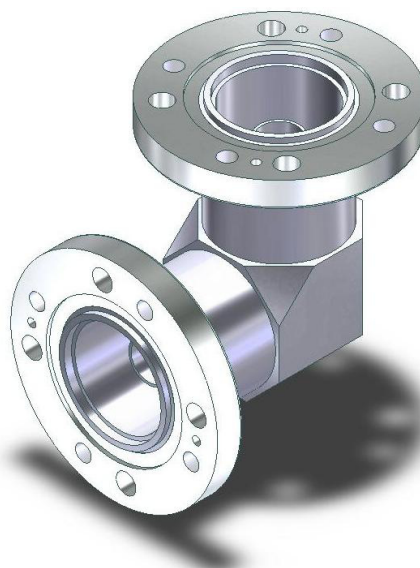

TECHNICAL DATA

Part Number	ADP158158
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.12 Kg

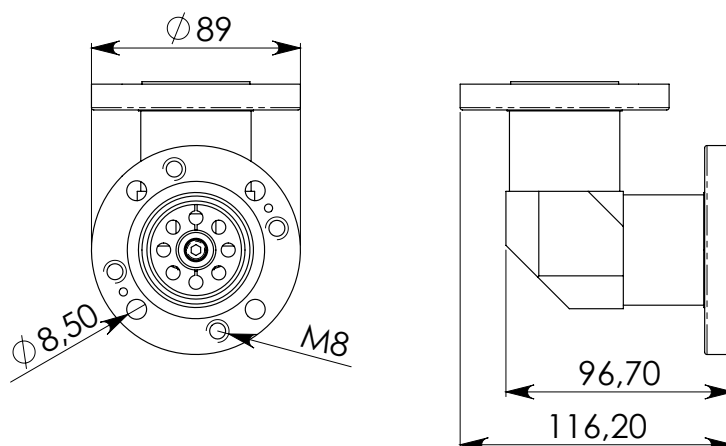


Flanged Elbow

3+1/8"




TECHNICAL DATA

Part Number	ADP318318
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminum / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 2.30 Kg

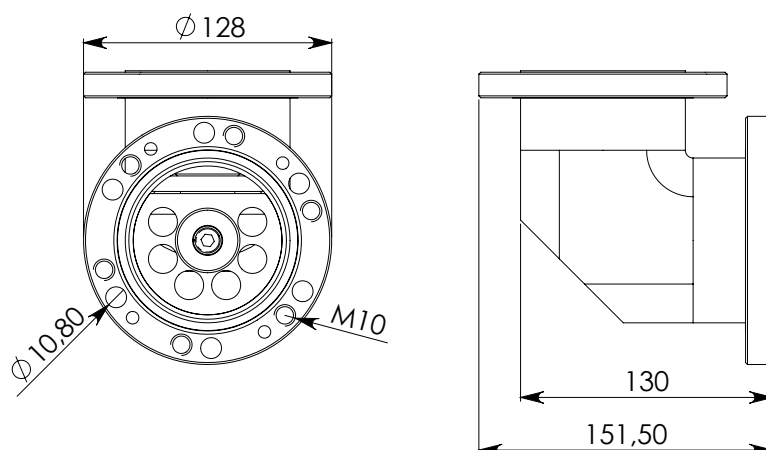



Coaxial Adaptors

7/8" female - 1+5/8" male

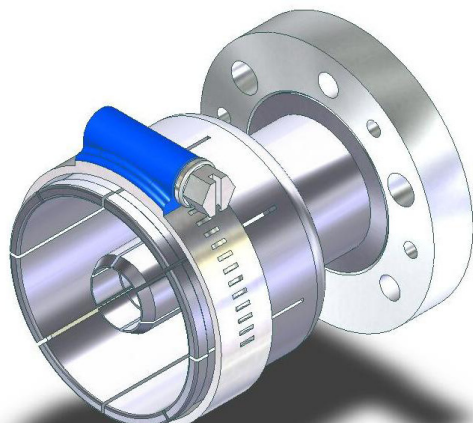


TECHNICAL DATA

Part Number	ADP78RL158
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8" - EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.36 Kg

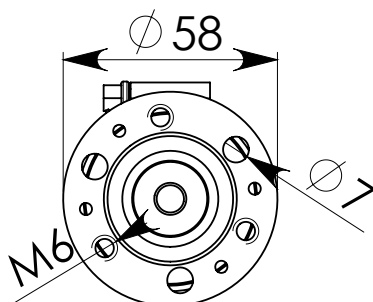


7/8" female - 4+1/2" female

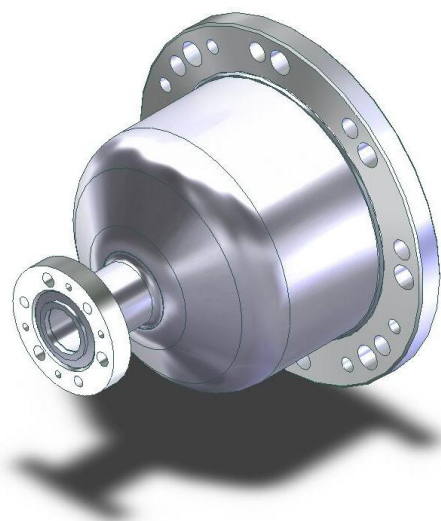


TECHNICAL DATA

Part Number	ADP41278C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8" - EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass - Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 3.37 Kg

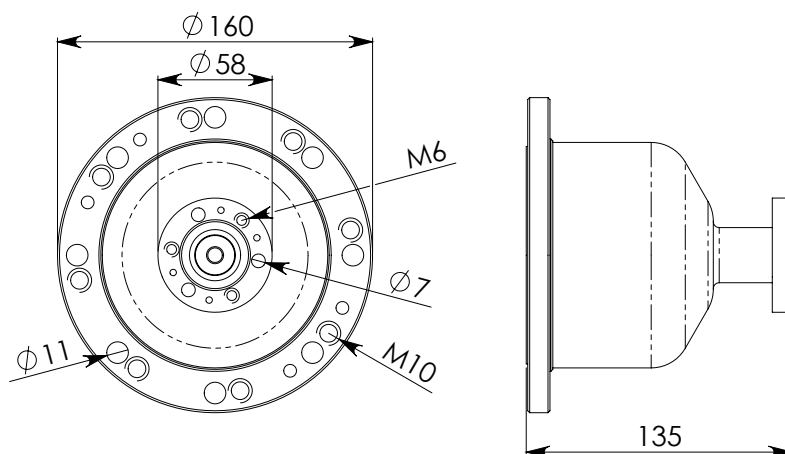


1+5/8" female - N female

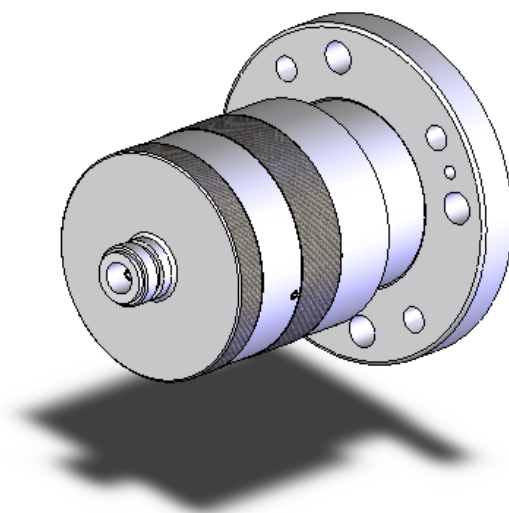


TECHNICAL DATA

Part Number	ADP158NF
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8" - N
Impedance	50 Ω
Average power VHF	≤ 500 W
Average power UHF	≤ 300 W
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.52 Kg

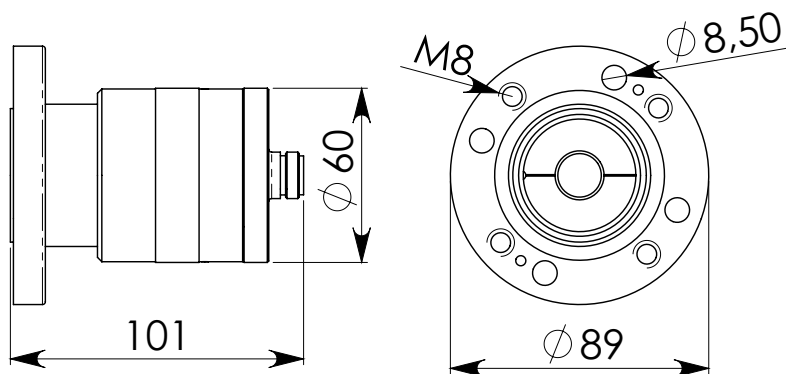


1+5/8" female - 7/16" female

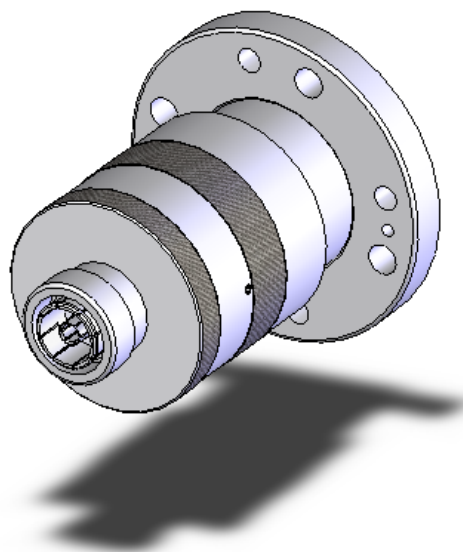


TECHNICAL DATA

Part Number	ADP15816F
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8" - DIN 7/16"
Impedance	50 Ω
Average power VHF	≤ 2 kW
Average power UHF	≤ 1.2 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.55 Kg

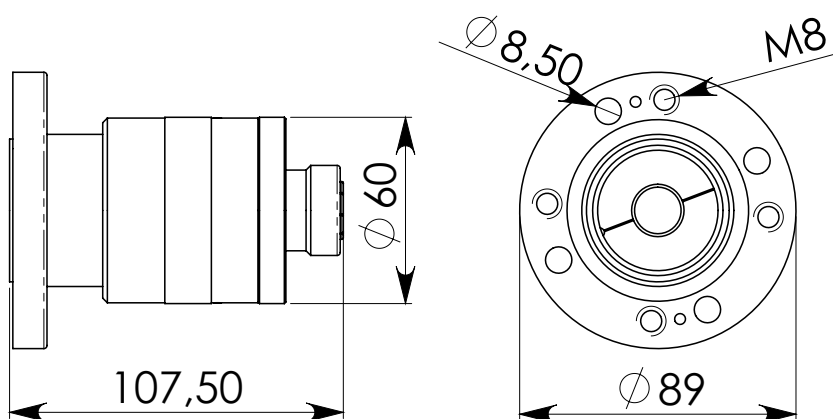


1+5/8" female - 7/8" female

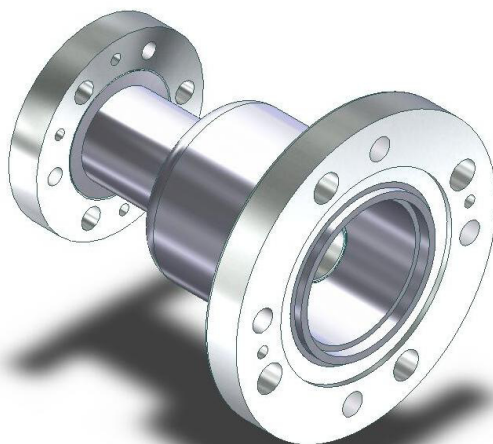


TECHNICAL DATA

Part Number	ADP1588C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8" - EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 0.96 Kg

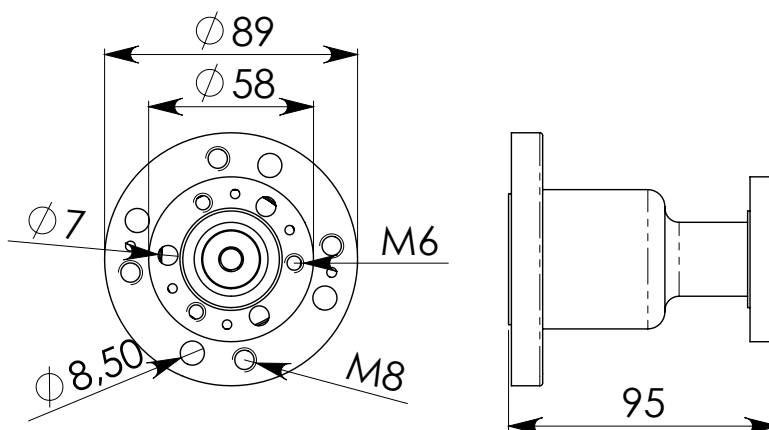


1+5/8" female - 4+1/2" female

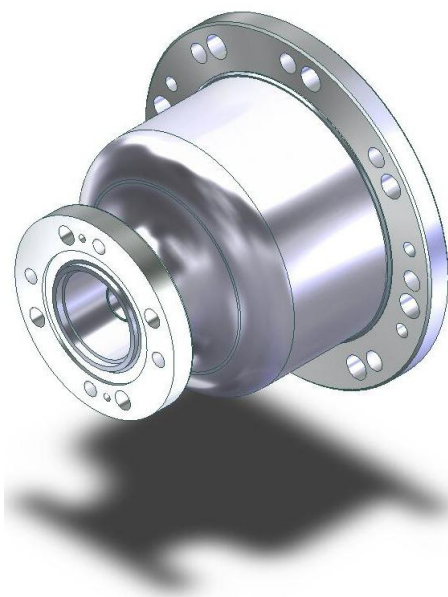

TECHNICAL DATA

Part Number	ADP412158C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8" - EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass - Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 2.01 Kg

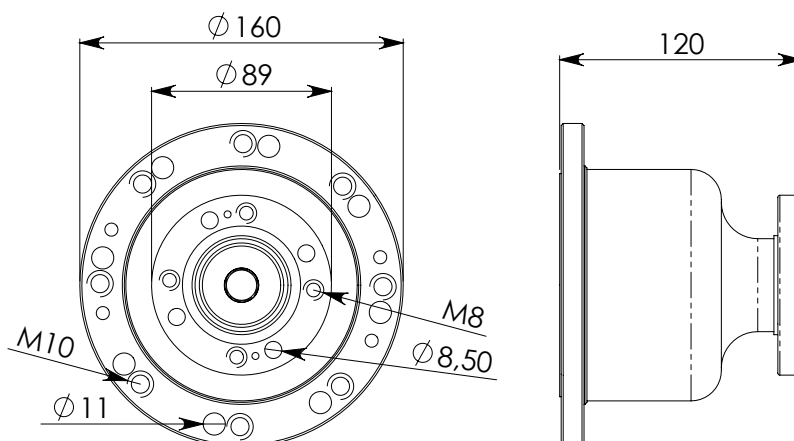


3+1/8" female - N female



TECHNICAL DATA

Part Number	ADP318NF
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8" - N
Impedance	50 Ω
Average power VHF	≤ 500 W
Average power UHF	≤ 300 W
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.5 Kg

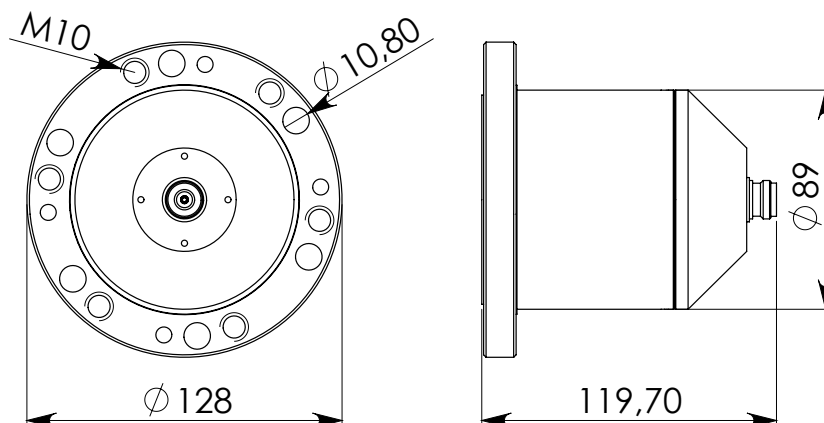


3+1/8" female - 7/16" female




TECHNICAL DATA

Part Number	ADP318716F
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8" - DIN 7/16"
Impedance	50 Ω
Average power VHF	≤ 2 kW
Average power UHF	≤ 1.2 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.3 Kg

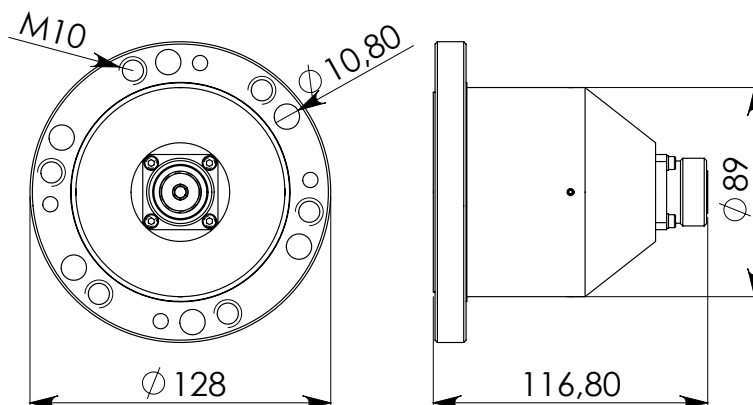


3+1/8" female - 7/8" female

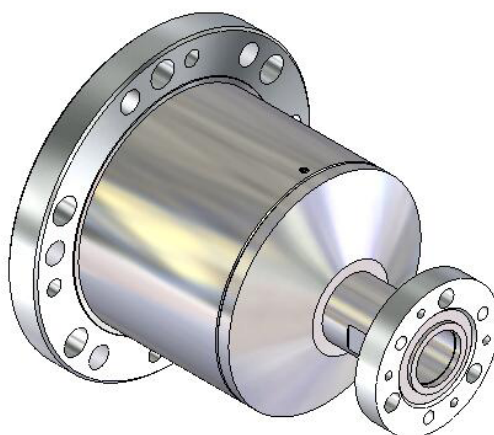

TECHNICAL DATA

Part Number	ADP31878F
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8" - EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze - Brass / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 1.5 Kg

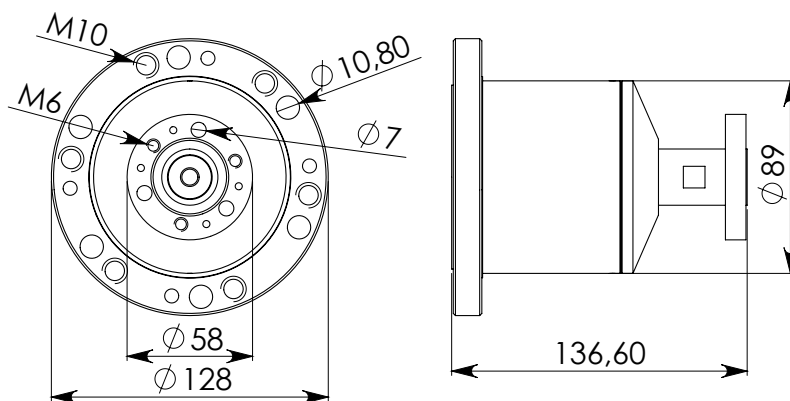


3+1/8" female - 1+5/8" female




TECHNICAL DATA

Part Number	ADP318158C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8" - EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze - Brass / Nickel plating
Corps / Treatment	Bronze / Nickel plating
Inner / Treatment	Aluminium / Alodine
Insulator	PTFE
Weight	~ 1.4 Kg

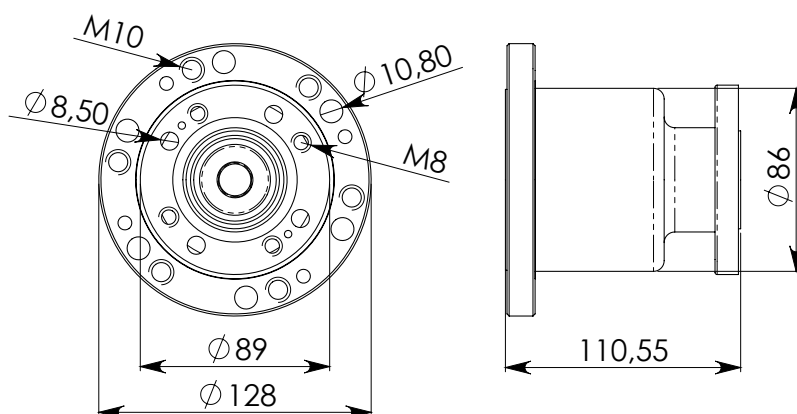


3+1/8" female - 4+1/2" female

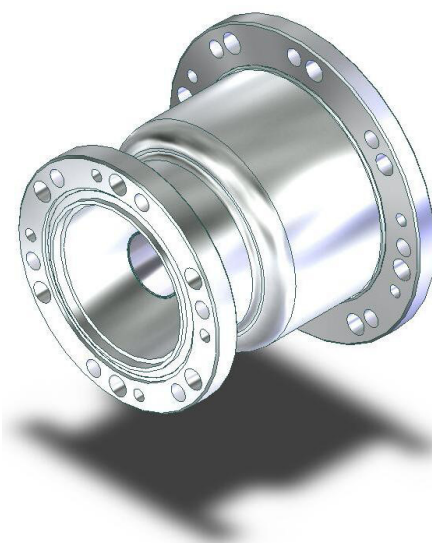


TECHNICAL DATA

Part Number	ADP412318C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8" - EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 2.2 Kg

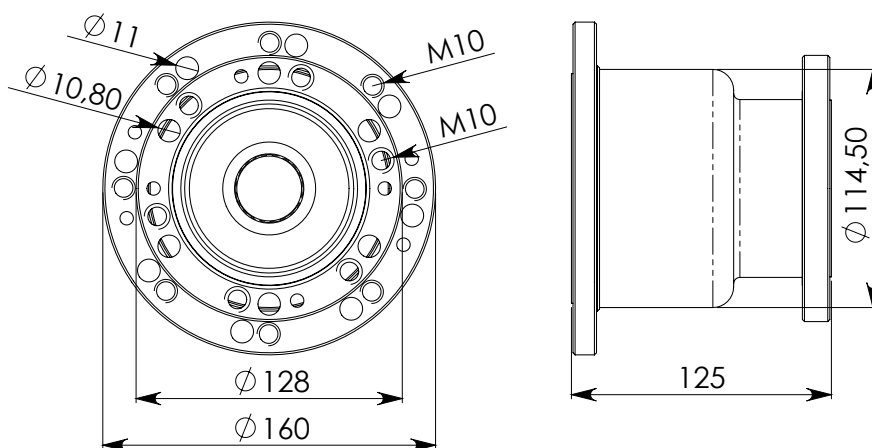


4+1/2" female - 6+1/8" female

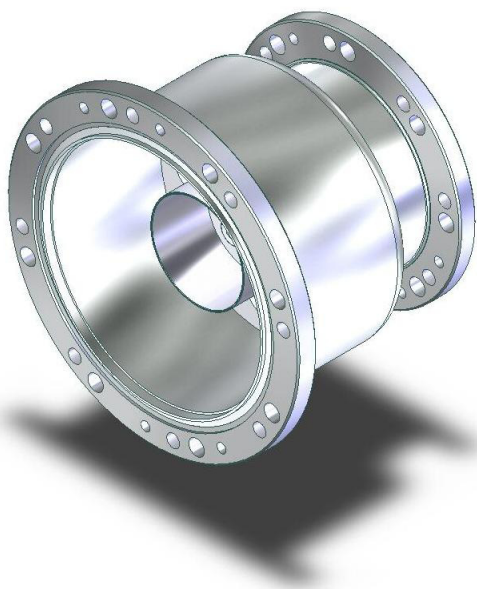


TECHNICAL DATA


Part Number	ADP618412C
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 4+1/2" - EIA 6+1/8"
Impedance	50 Ω
Average power VHF	≤ 40 kW
Average power UHF	≤ 37 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Inner / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 3.9 Kg

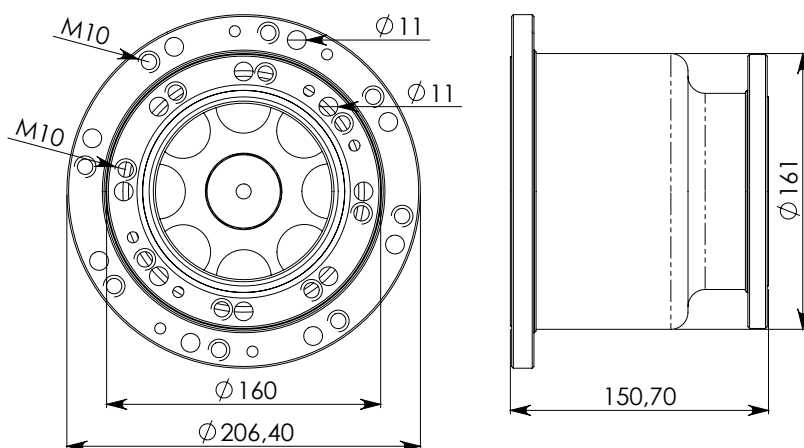


Inners

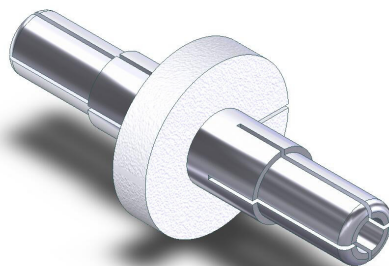
**TECHNICAL DATA**

Part Number	CNTF8
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.02 Kg

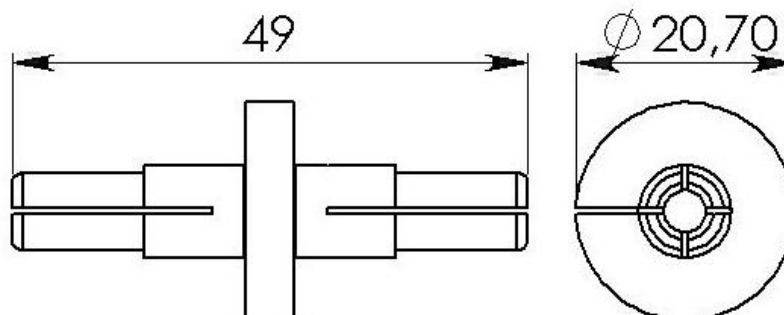

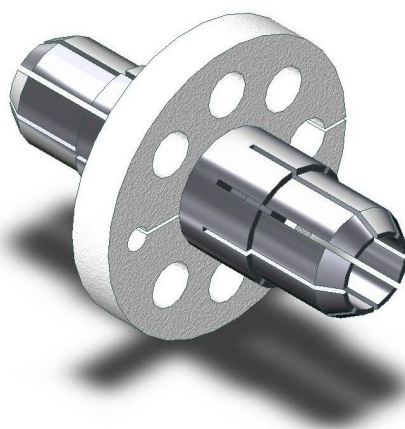
**TECHNICAL DATA**


Part Number	CNT158
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.06 Kg

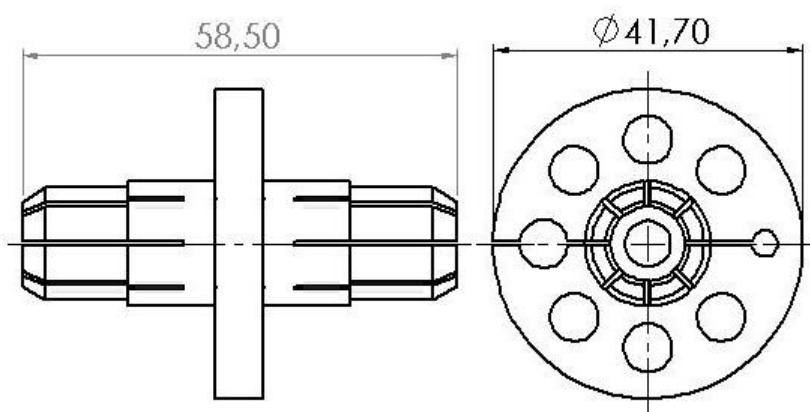


**TECHNICAL DATA**

Part Number	CNT318
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.25 Kg

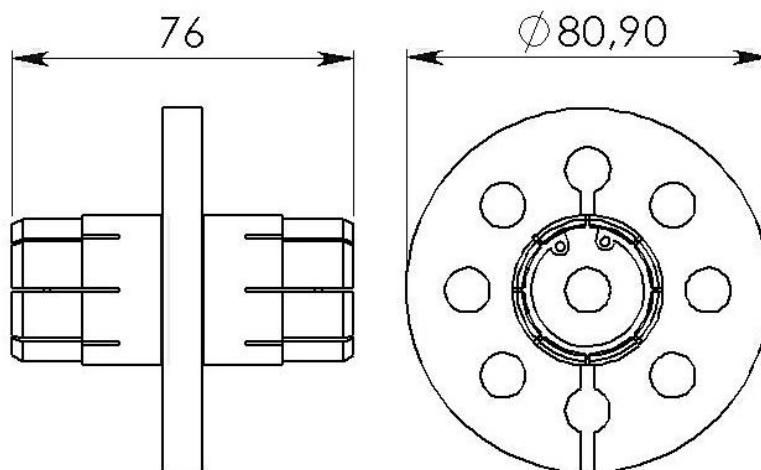


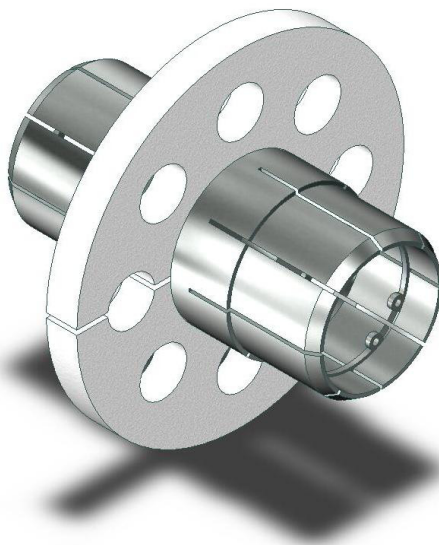**TECHNICAL DATA**



Part Number	CNT412
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 70 kW
Average power UHF	≤ 37 kW
Return Loss	≥ 32dB
Operating Temperature Range	-40 ÷ +70° C
Inner / Treatment	Phosphor Bronze / Silver plated
Insulator	PTFE
Weight	~ 0.55 Kg

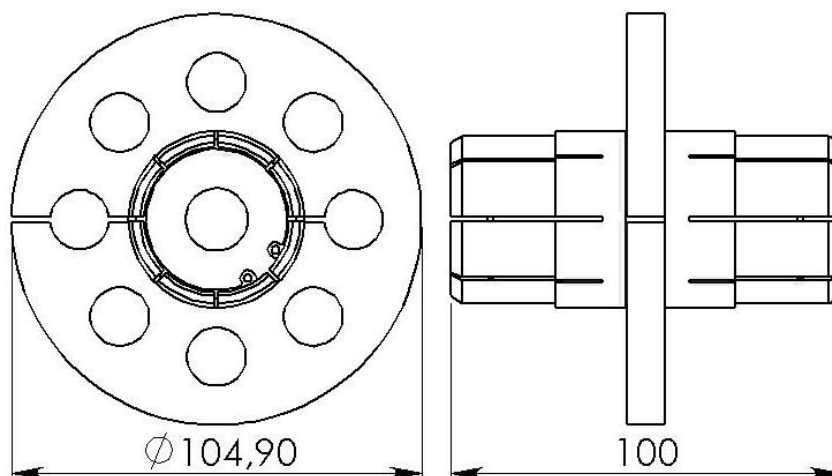


Coaxial Rigid Lines

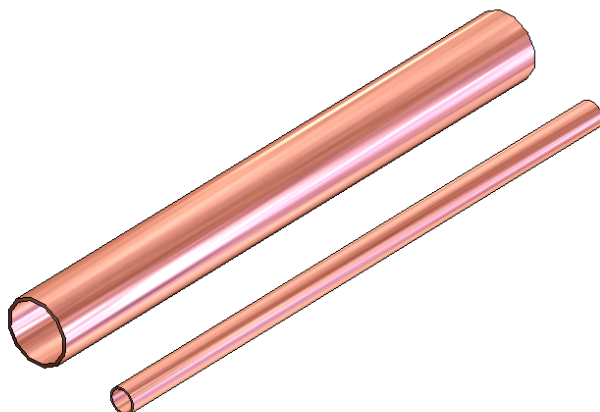
**TECHNICAL DATA**

Part Number	CCXRL78
Frequency Range	DC/1.5 Ghz
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Operating Temperature Range	-40 $\div$ +70° C
Inner/Outer conductor	Polished Copper
Lenght	On request
Weight	~ 0.9 Kg/m

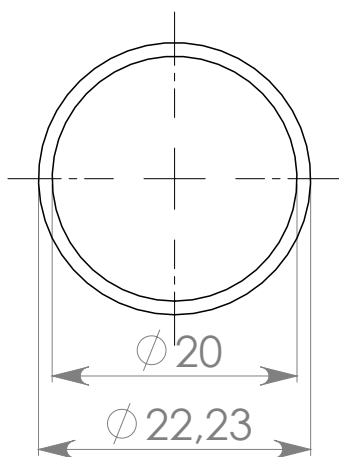

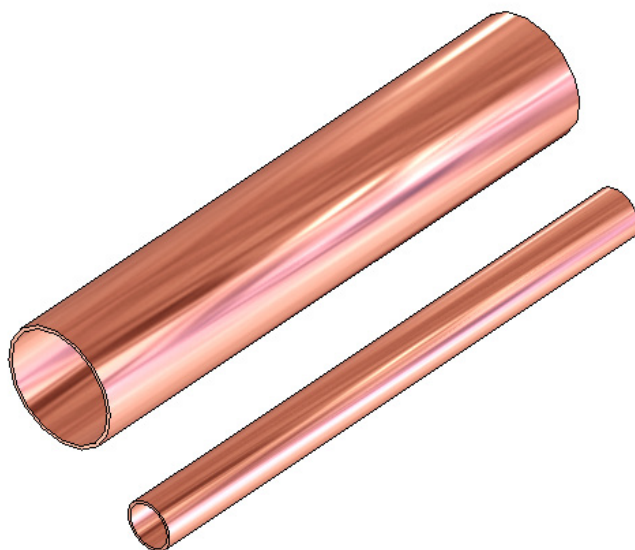
**TECHNICAL DATA**

Part Number	CCXRL158
Frequency Range	DC/1.5 Ghz
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Operating Temperature Range	-40 $\div$ +70° C
Inner/Outer conductor	Polished Copper
Length	On request
Weight	~ 2.1 Kg/m

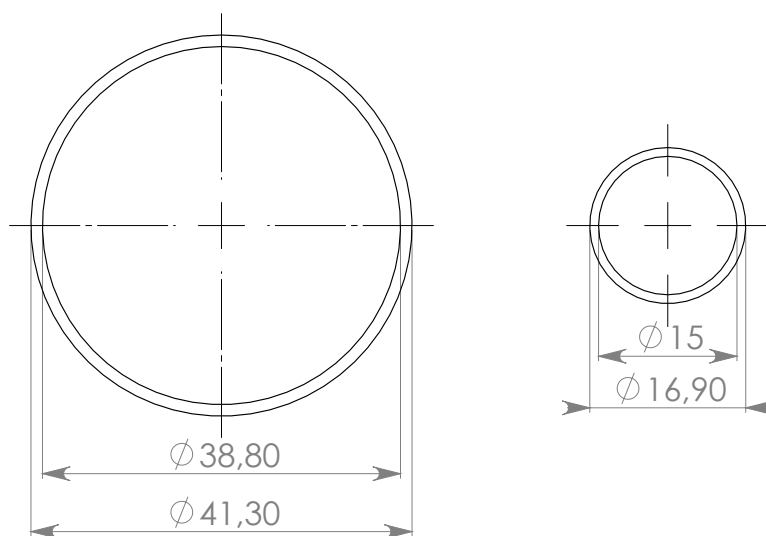


Coaxial Rigid Lines

3+1/8"

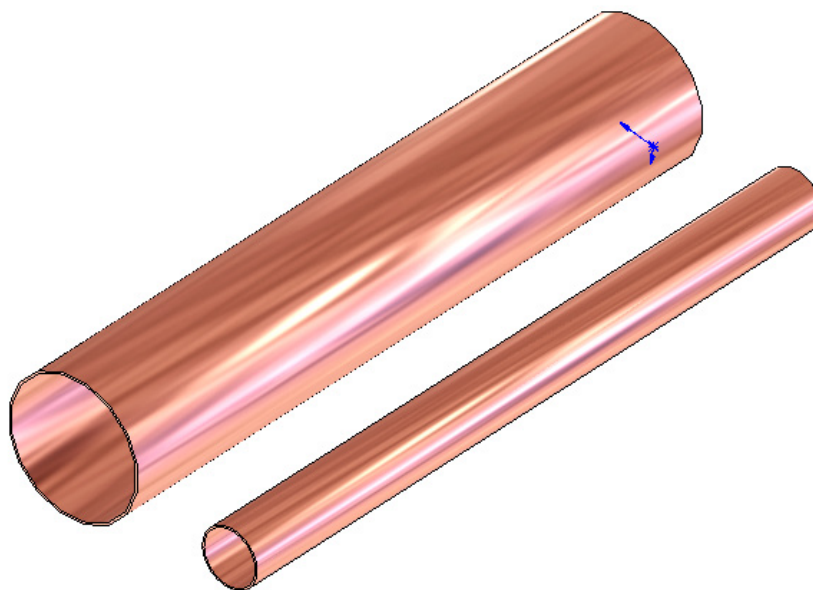


TECHNICAL DATA

Part Number	CCXRL318
Frequency Range	DC/1.5 Ghz
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Operating Temperature Range	-40 $\div$ +70° C
Inner/Outer conductor	Polished Copper
Lenght	On request
Weight	~ 4.0 Kg/m

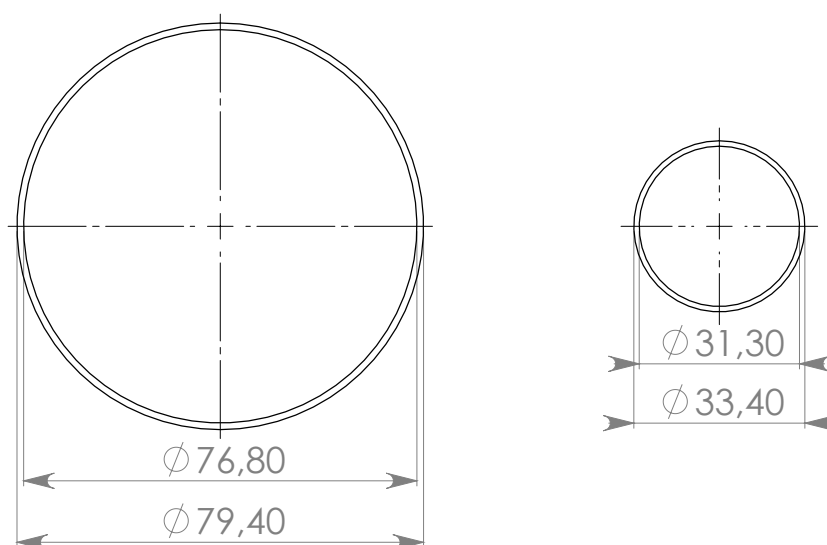


Centering for Rigid Lines


7/8"

**TECHNICAL DATA**

Part Number	CENISRL78
Operating Temperature Range	-40 ÷ +70° C
Material	PTFE
Weight	~ 1.3 g


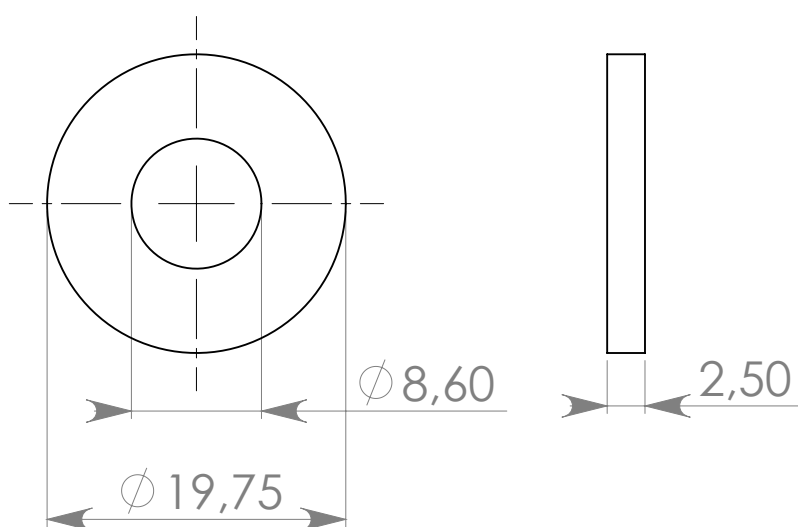


1+5/8"

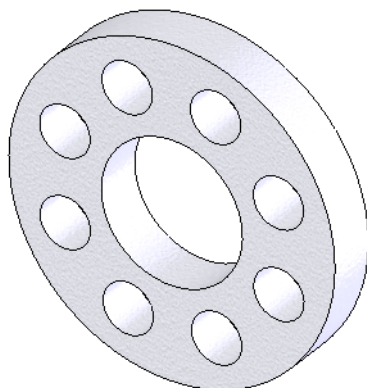


TECHNICAL DATA

Part Number	CENISRL158
Operating Temperature Range	-40 ÷ +70° C
Material	PTFE
Weight	~ 10 g

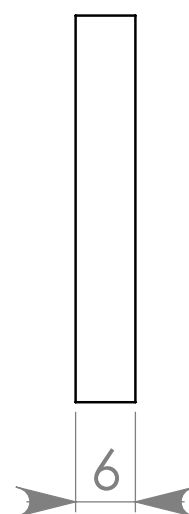
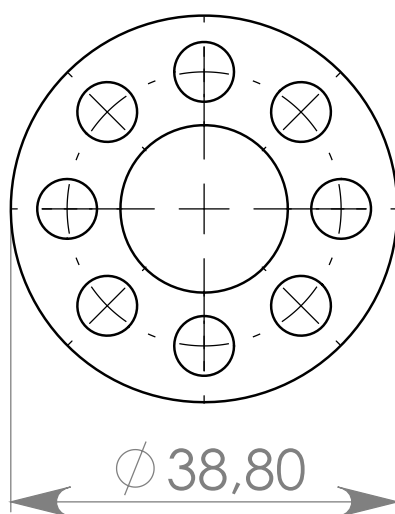


3+1/8"

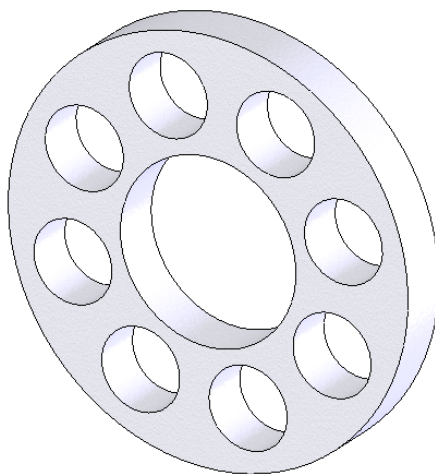


TECHNICAL DATA

Part Number	CENISRL318
Operating Temperature Range	-40 ÷ +70° C
Material	PTFE
Weight	~ 50 g

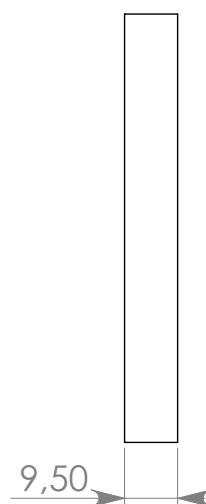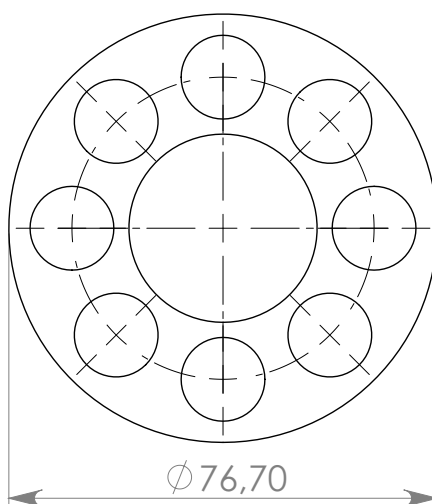


4+1/2"

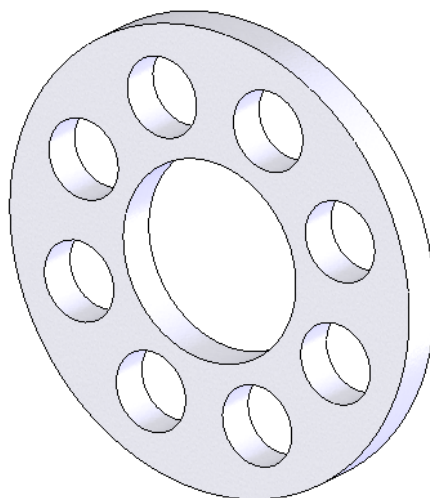


TECHNICAL DATA

Part Number	CENISRL412
Operating Temperature Range	-40 ÷ +70° C
Material	PTFE
Weight	~ 93 g

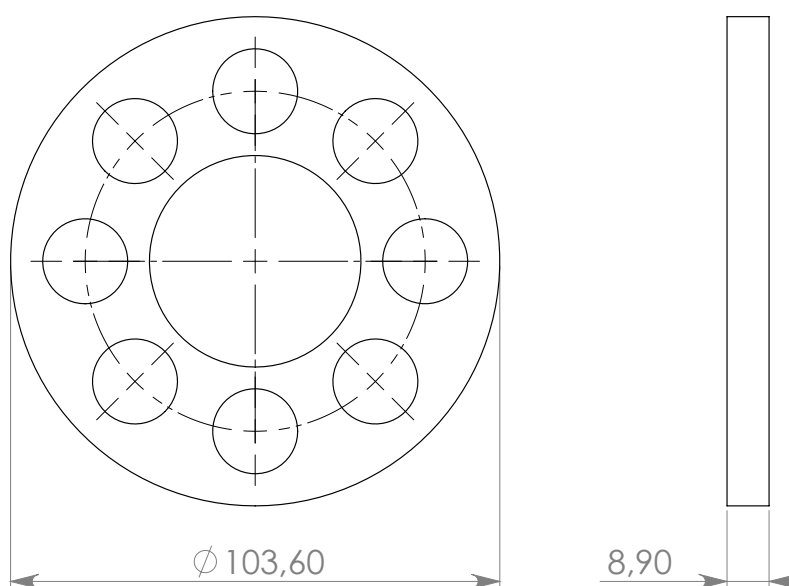


Flanges




TECHNICAL DATA

Part Number	CNT78FLX78RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Aluminium / Alodine
Weight	~ 0.16 Kg

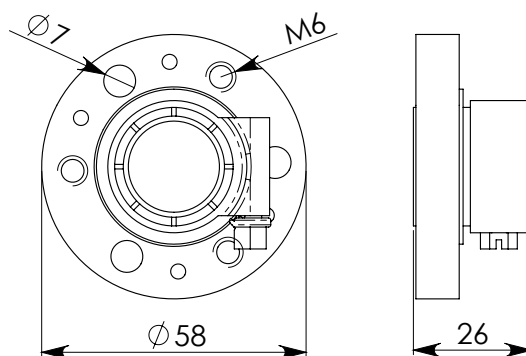


Flanges

1+5/8"

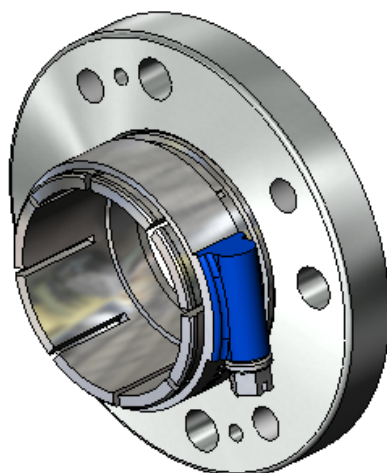


TECHNICAL DATA

Part Number	CNT58FLX58RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Aluminium / Alodine
Weight	~ 0.43 Kg

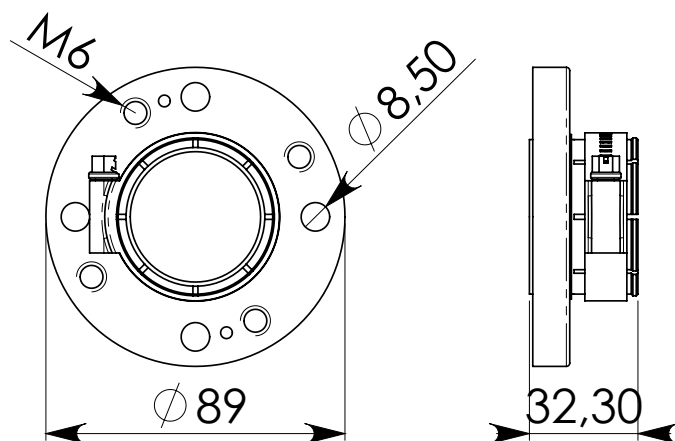


Flanges

3+1/8"

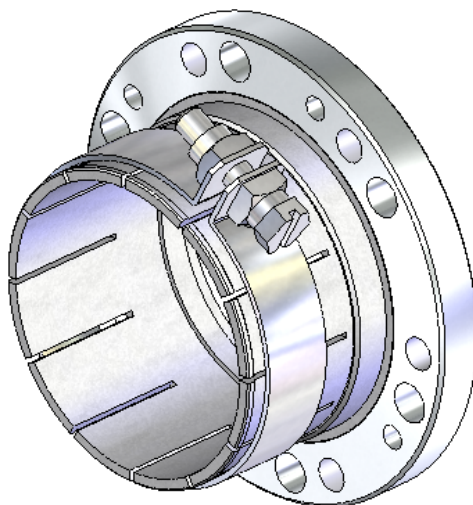


TECHNICAL DATA

Part Number	CNT18FLX18RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Aluminium / Alodine
Weight	~ 0.82 Kg

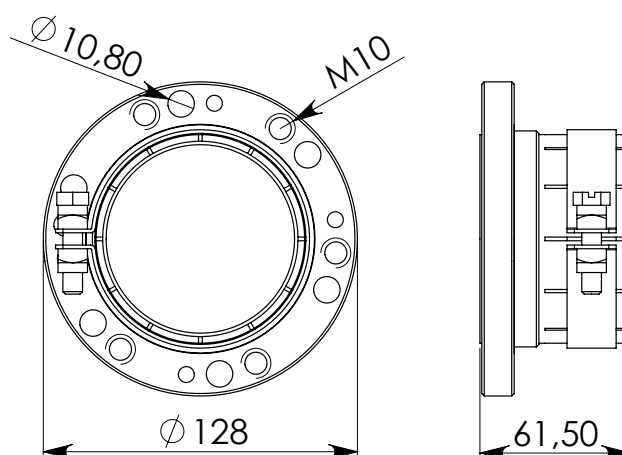


Flanges

4+1/2"

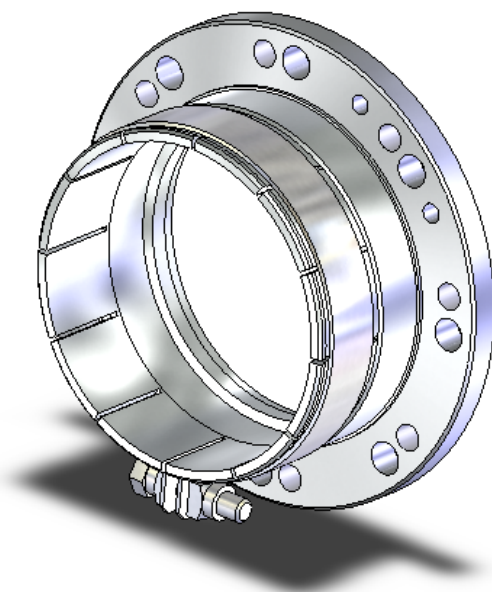


TECHNICAL DATA

Part Number	CNT41FLX41RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 70 kW
Average power UHF	≤ 37 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Bronze / Nickel plating
Weight	~ 1.5 Kg

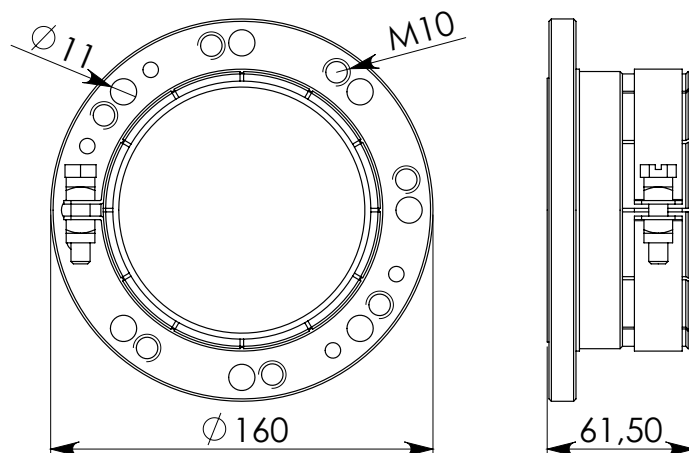


Directional Couplers

1+5/8" (2 probes)

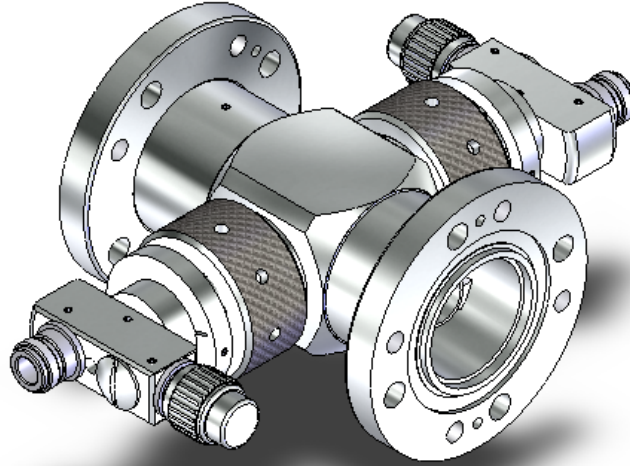


TECHNICAL DATA

Part Number	ACCDIR158DS
Frequency Range	10 ÷ 900 Mhz
In/Out connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Coupling factor	-60dB, other values on request
Directivity	> 30dB
Probe connectors	N female
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / Nickel plating
Inner / Treatment	Copper / Silver plated
Probe / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 3.2 Kg


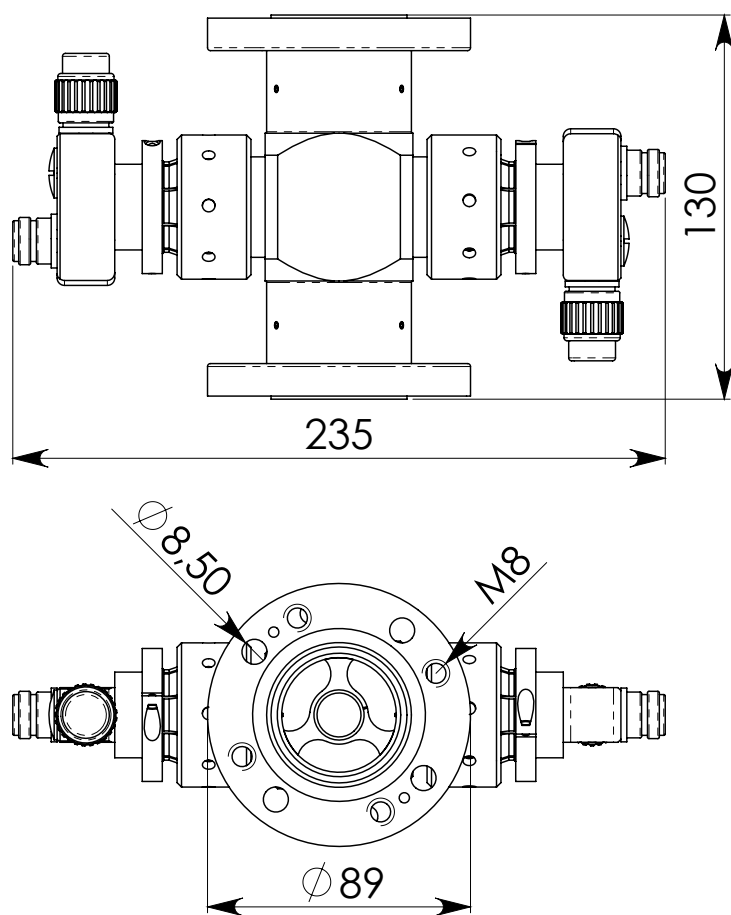


3+1/8" (2 probes)

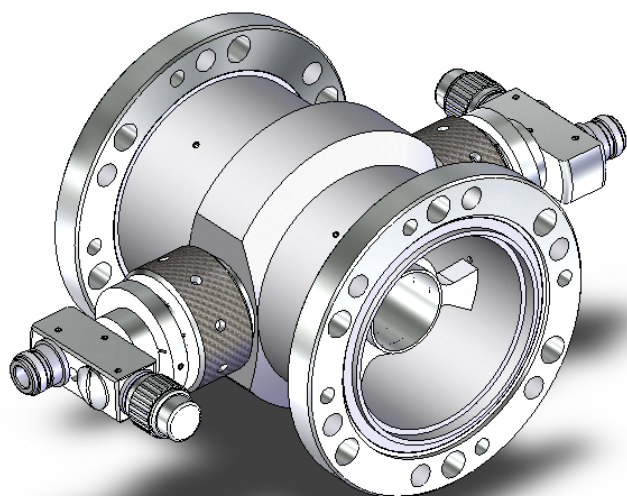


TECHNICAL DATA

Part Number	ACCDIR318DS
Frequency Range	10 ÷ 900 Mhz
In/Out connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Coupling factor	-60dB, other values on request
Directivity	> 30dB
Probe connectors	N female
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Bronze / Nickel plating
Inner / Treatment	Copper / Silver plated
Probe / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 5.4 Kg

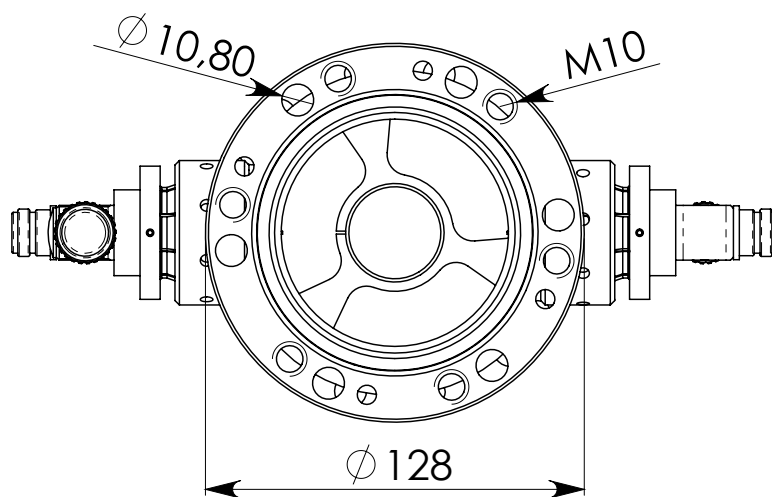
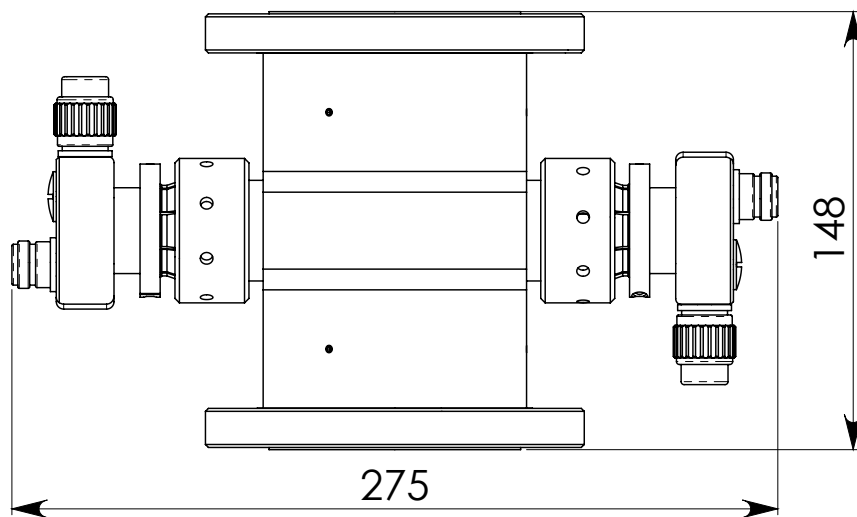


4+1/2" (2 probes)

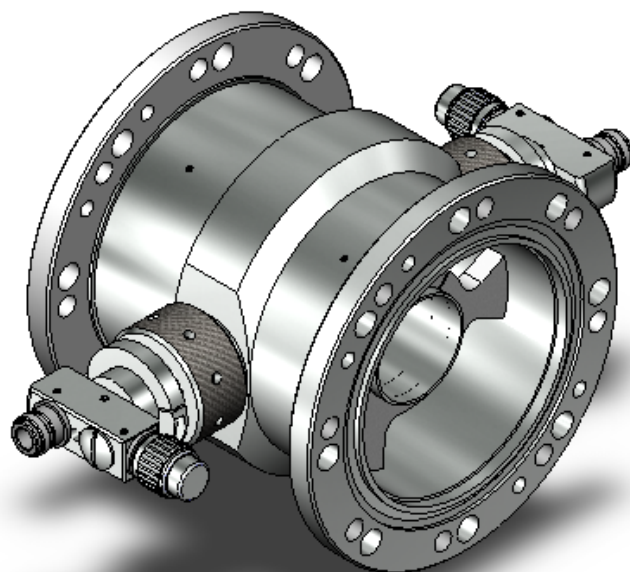


TECHNICAL DATA

Part Number	ACCDIR412DS
Frequency Range	10 ÷ 900 Mhz
In/Out connectors	EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 70 kW
Average power UHF	≤ 37 kW
Coupling factor	-60dB, other values on request
Directivity	> 30dB
Probe connectors	N female
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Bronze / Nickel plating
Inner / Treatment	Copper / Silver plated
Probe / Treatment	Brass / Silver plated
Insulator	PTFE
Weight	~ 6.6 Kg

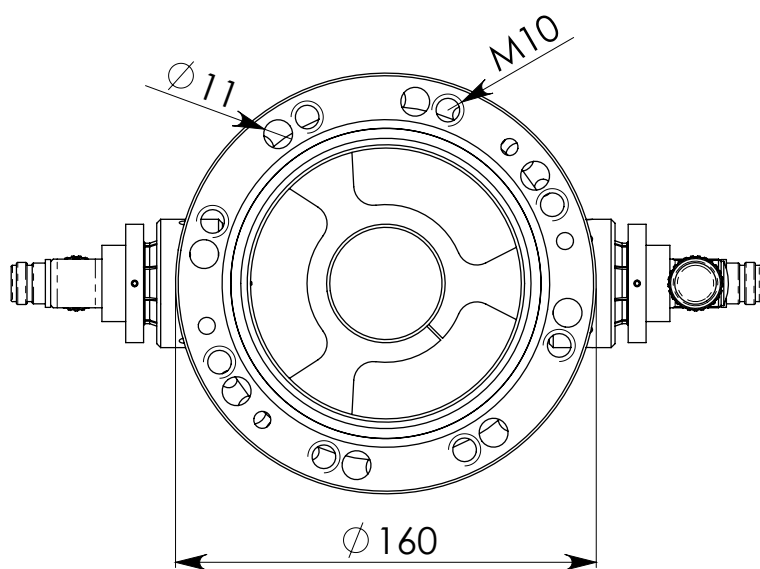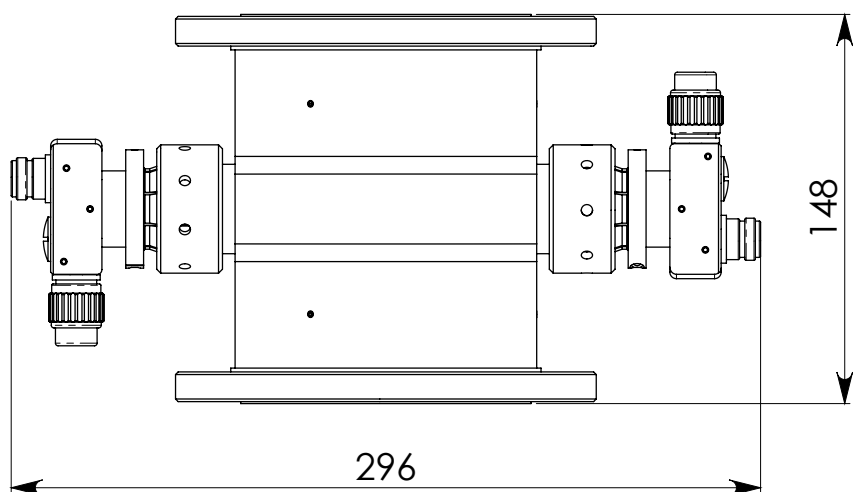

Accessories for Directional Couplers


Digital Power Meter FM

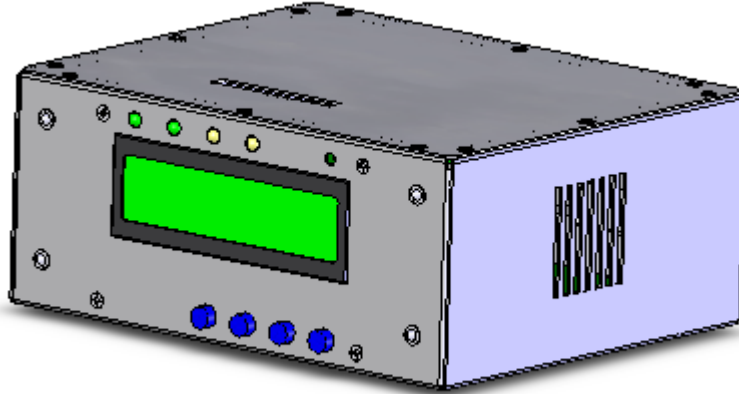

TECHNICAL DATA

Part Number	PWRMETER-D1
Operating Voltage	115-230 Vac 50 ÷ 60 Hz
Consumption	< 5 W
Dimensions	85 mm (H) x 200 mm (W) x 167 mm (D)
Forward RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Reflected RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Remote connector outputs	
Relay contact	80% FWD
Relay contact	50% FWD
Relay contact	50% RFL
Full scale RF input (W)	10-20-50-100-200-500-1K-2K-5K-10K-20K-50K


Digital Power Meter TV

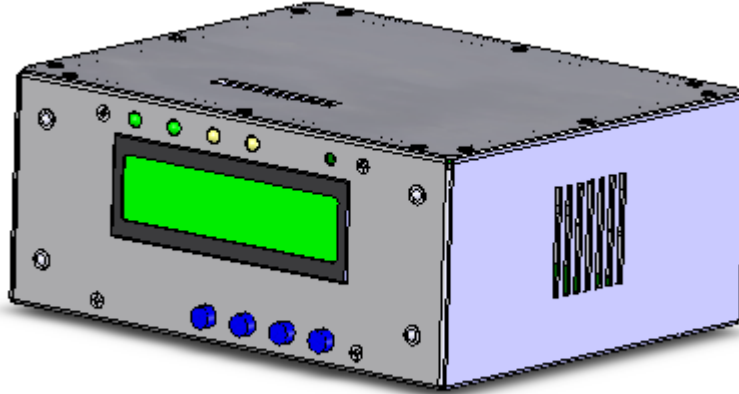

TECHNICAL DATA

Part Number	PWRMETER-D2
Operating Voltage	115-230 Vac 50 ÷ 60 Hz
Consumption	< 5 W
Dimensions	85 mm (H) x 200 mm (W) x 167 mm (D)
Forward RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Reflected RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Remote connector outputs	
Relay contact	80% FWD
Relay contact	50% FWD
Relay contact	50% RFL
Full scale RF input (W)	10-20-50-100-200-500-1K-2K-5K-10K-20K-50K


Digital Power Meter FM with panel

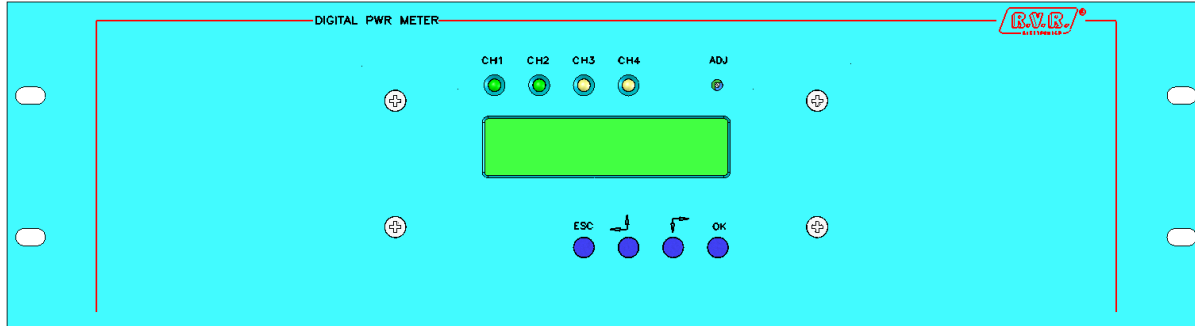

TECHNICAL DATA

Part Number	PWRMETER-D1P
Operating Voltage	115-230 Vac 50 ÷ 60 Hz
Consumption	< 5 W
Dimensions	Standard 3-units rack
Forward RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Reflected RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Remote connector outputs	
Relay contact	80% FWD
Relay contact	50% FWD
Relay contact	50% RFL
Full scale RF input (W)	10-20-50-100-200-500-1K-2K-5K-10K-20K-50K

Digital Power Meter TV with panel

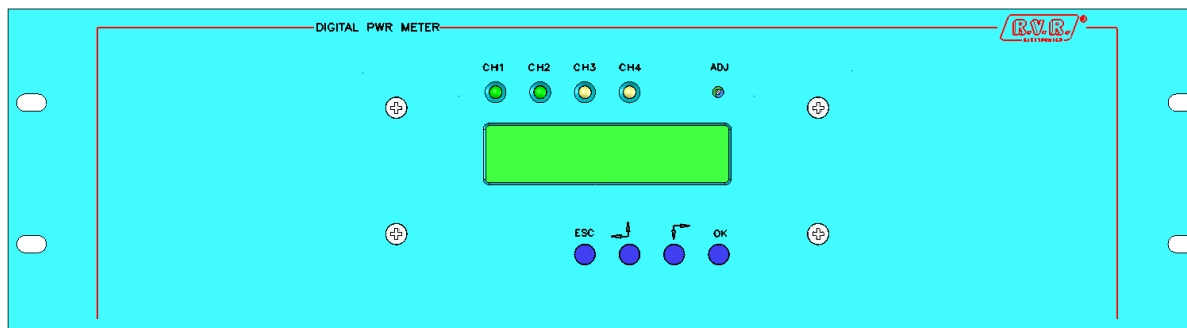


TECHNICAL DATA

Part Number	PWRMETER-D2P
Operating Voltage	115-230 Vac 50 ÷ 60 Hz
Consumption	< 5 W
Dimensions	Standard 3-units rack
Forward RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Reflected RF input	
Connector	BNC
Impedance	50 Ω
Input Level / Adjust	10 dBm
Remote connector outputs	
Relay contact	80% FWD
Relay contact	50% FWD
Relay contact	50% RFL
Full scale RF input (W)	10-20-50-100-200-500-1K-2K-5K-10K-20K-50K



Dummy Load

150 W

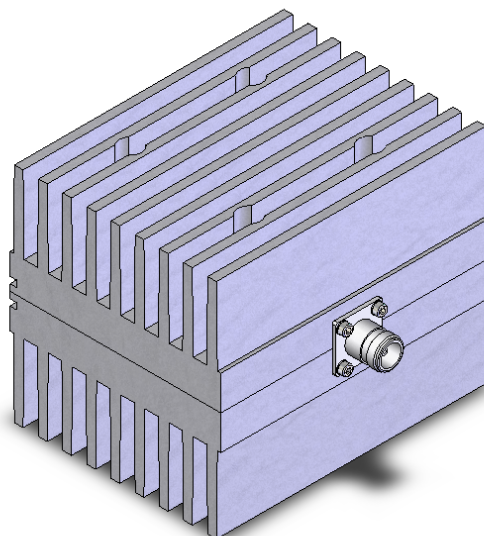


TECHNICAL DATA

Part Number	EDL150-FM
Frequency Range	DC ÷ 108 Mhz
Connections	N female
Impedance	50 Ω
Max power	150 W
Return Loss	> 27dB
Cooling system	Convection
Operating Temperature Range	-10 ÷ +50° C
Blower AC power	N.A.
Weight	3.3 Kg

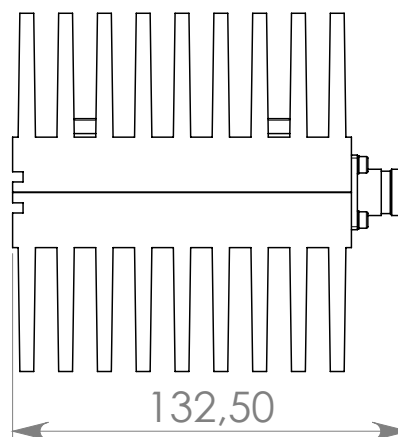
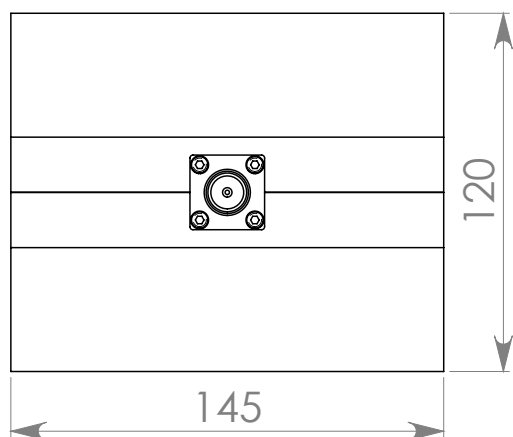


250 W

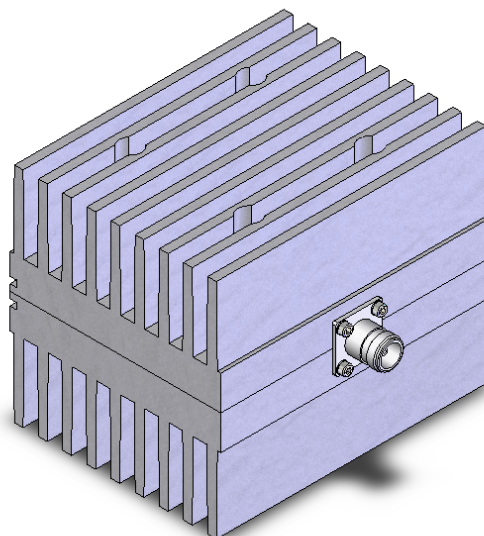


TECHNICAL DATA

Part Number	EDL250-FM
Frequency Range	DC ÷ 108 Mhz
Connections	N female
Impedance	50 Ω
Max power	250 W
Return Loss	> 27dB
Cooling system	Convection
Operating Temperature Range	-10 ÷ +50° C
Blower AC power	N.A.
Weight	3.3 Kg

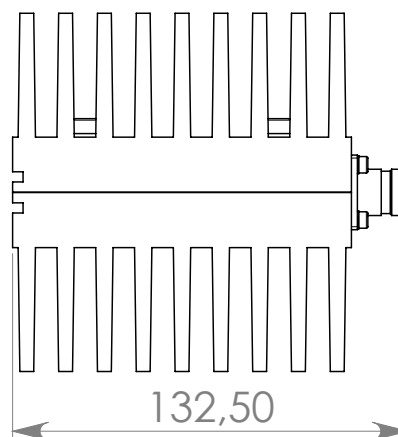
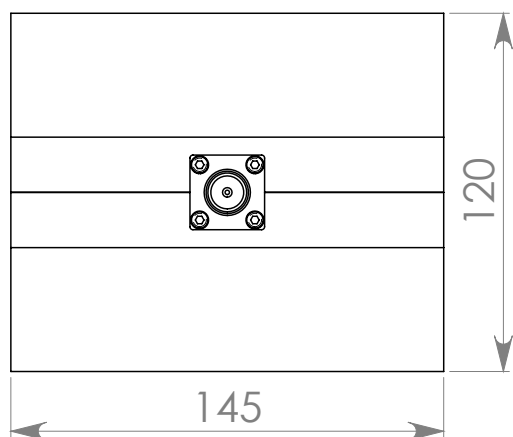


5 Kw FM air forced

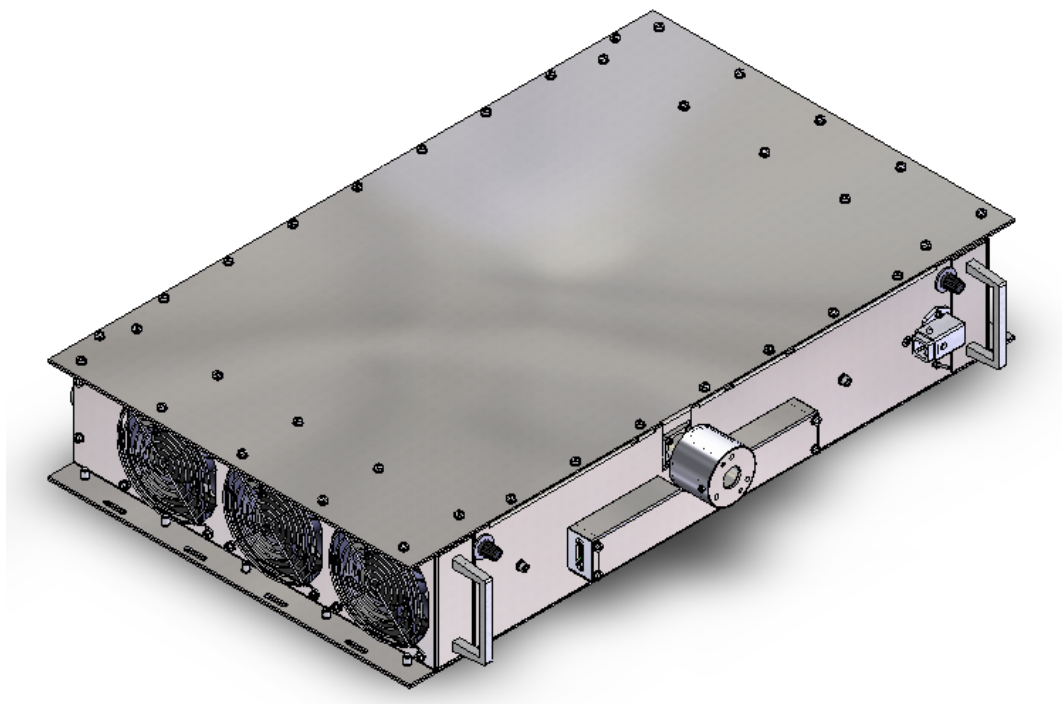



TECHNICAL DATA

Part Number	EDL5000-FM
Frequency Range	DC ÷ 108 Mhz
Connections	EIA 7/8"
Impedance	50 Ω
Max power	5 kW
Return Loss	> 27dB
Cooling system	Air forced
Operating Temperature Range	-10 ÷ +50° C
Blower AC power	110 or 220 V
Weight	31 Kg

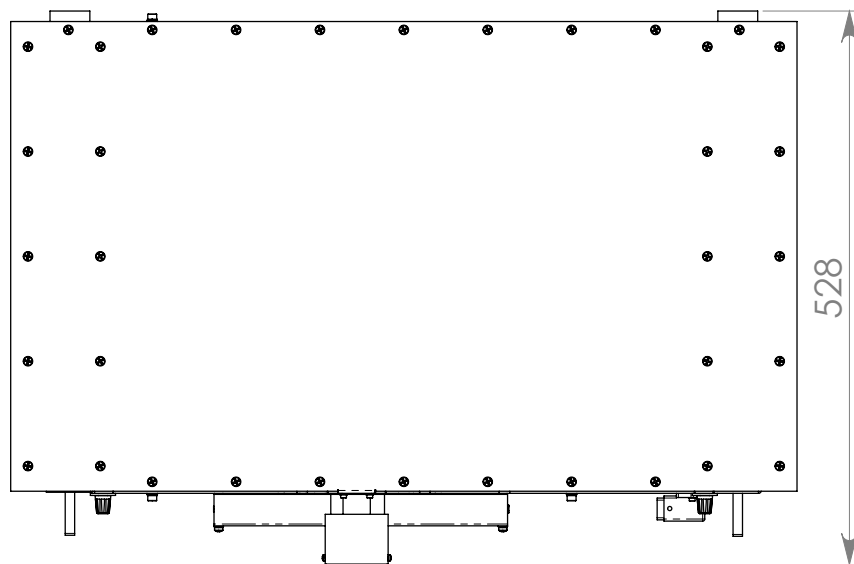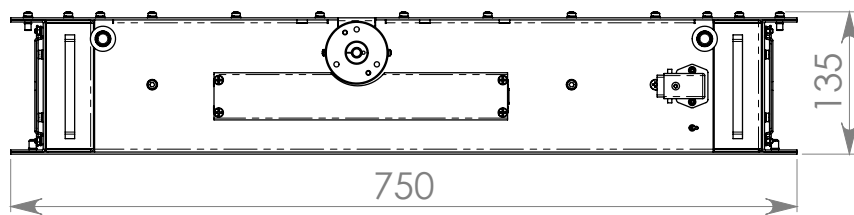



Coaxial Switching Relay

2-Way Coaxial Switching Relay, EIA 1+5/8"

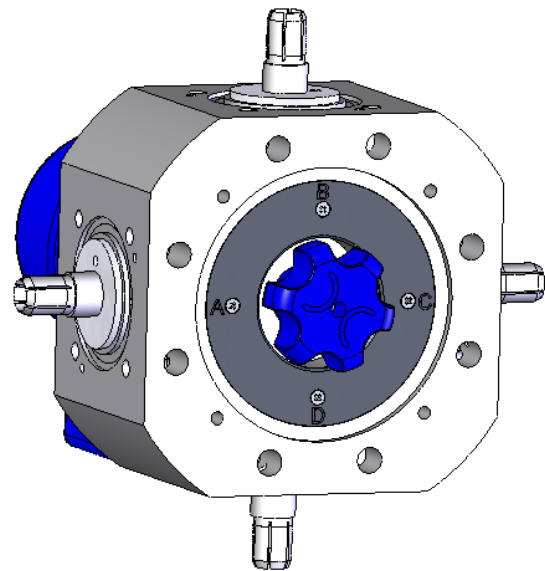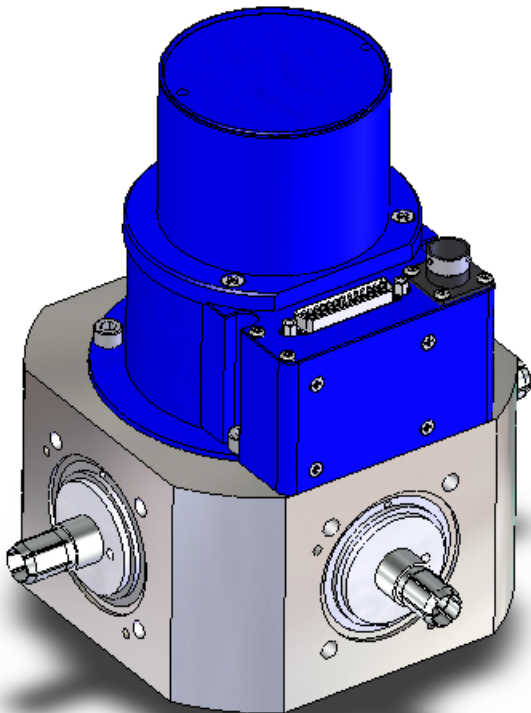


TECHNICAL DATA

Part Number	RLY158-220-24
Frequency Range	DC ÷ 1 GHz
Connections	EIA 1+5/8"
Impedance	50 Ω
Average power	≤ 15.0 kW @ 100 MHz ≤ 10.0 kW @ 230 MHz ≤ 5.0 kW @ 860 MHz
Return Loss	≥ 30 dB
Isolation	≤ 75 dB
Operating Voltage	230 VAC ± 10%, 50 ÷ 60 Hz
Control Voltage	12 ÷ 26 VDC
Operating Current	≤ 0.5 A
Switching Time	≤ 1 s
Ambient Temperature	-10 ÷ +50 °C
Weight	ca. 5.0 kg

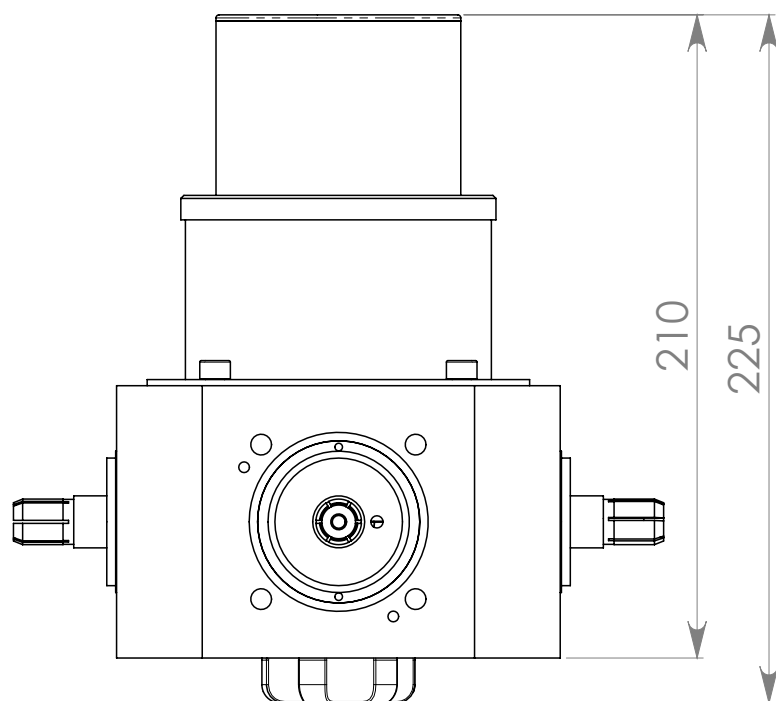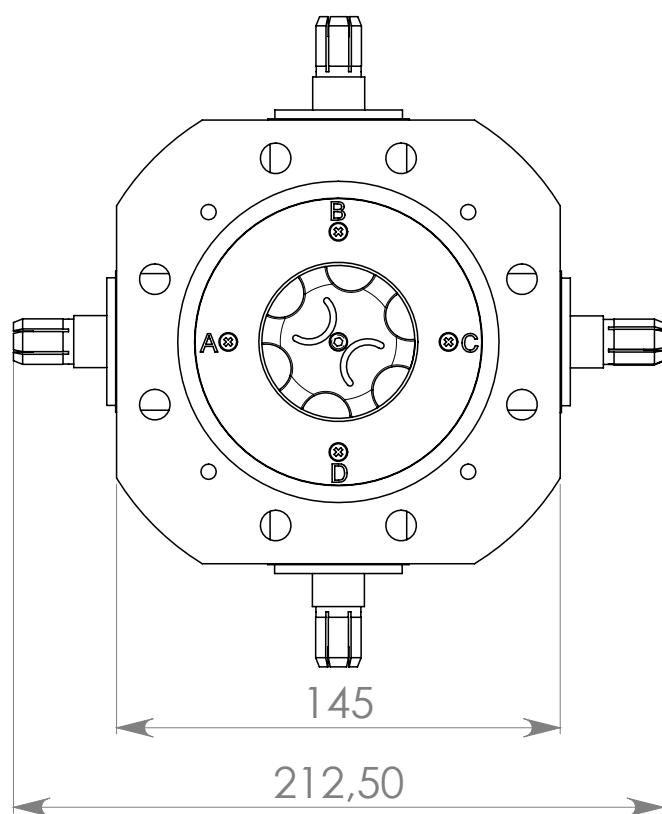

Accessories for Coaxial Switching Relay


Control Panel for coaxial relay

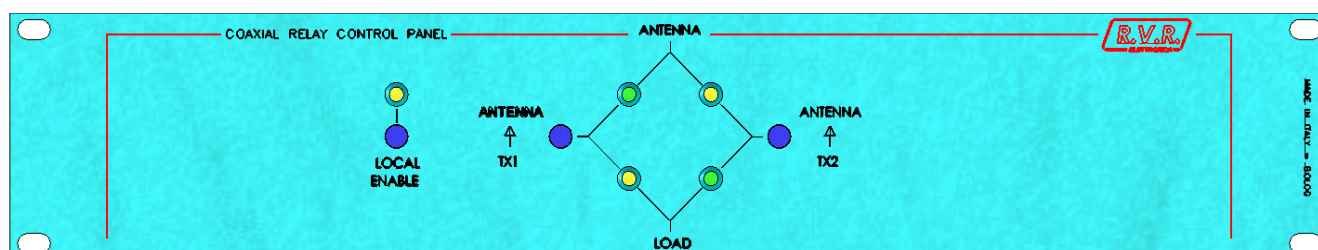

TECHNICAL DATA

Part Number	KPANCRCP126
Operating Voltage	115-230 VAC $\pm$ 10%, 50 $\div$ 60 Hz
Out Control Voltage	12 VDC
Dimensions	Standard 2-units rack
Weight	ca. 1 kg

Fast by-pass Patch panel 1+5/8"


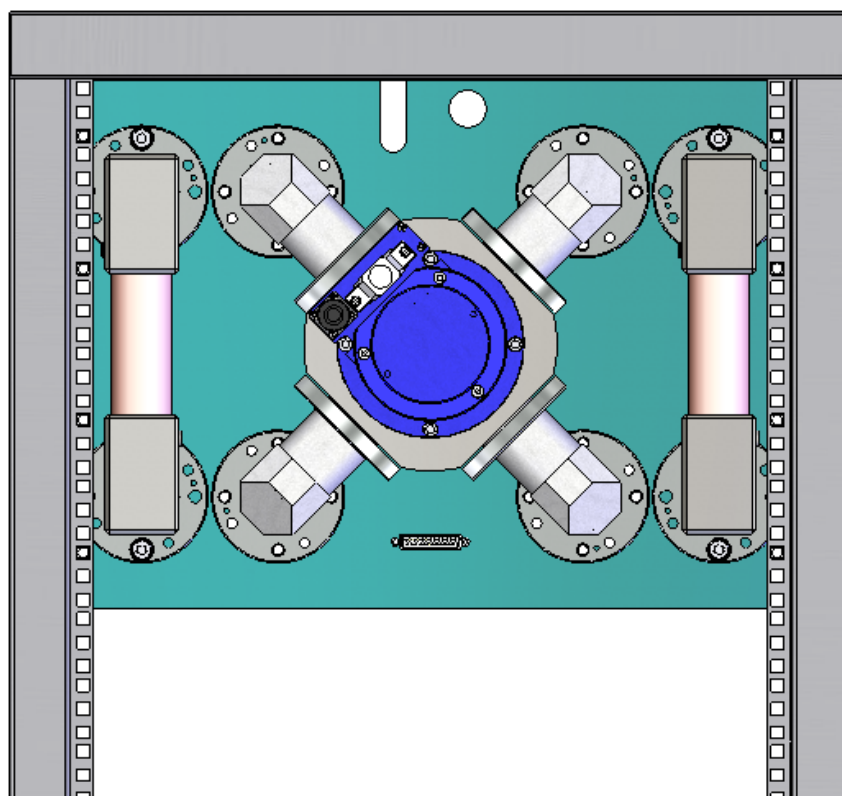



This device permits to by-pass the motorized coaxial relay when the electrical control device and the manual control system, are both in failure.

You can remove the coaxial relay and use instead of it two manual links that can be connected in the same ports.

TECHNICAL DATA


Part Number	BYPASSRCOAX158
Relay connectors	EIA 1+5/8
U-links numbers	2
U-links size	EIA 1+5/8"
Dimensions	Standard 8-units rack

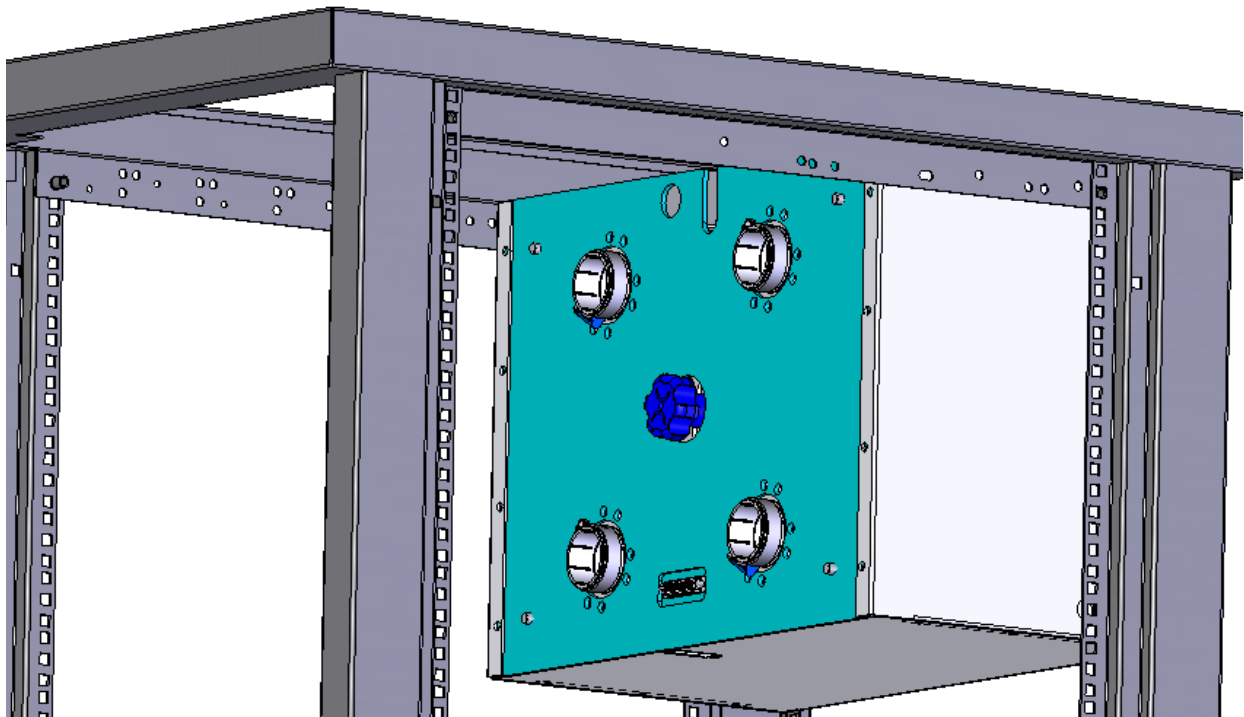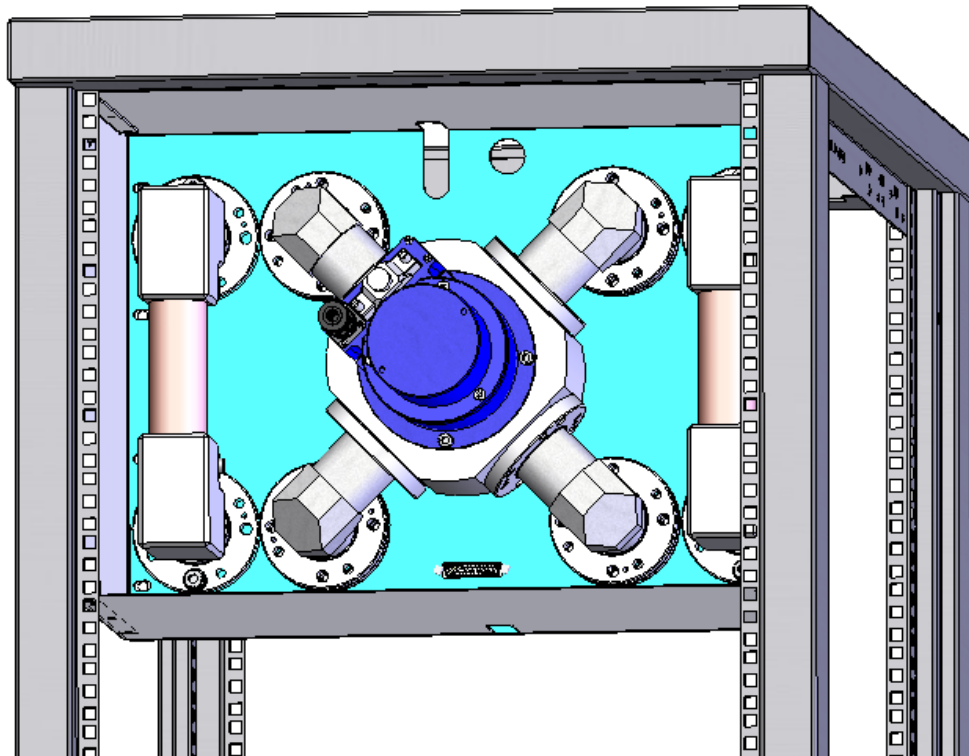

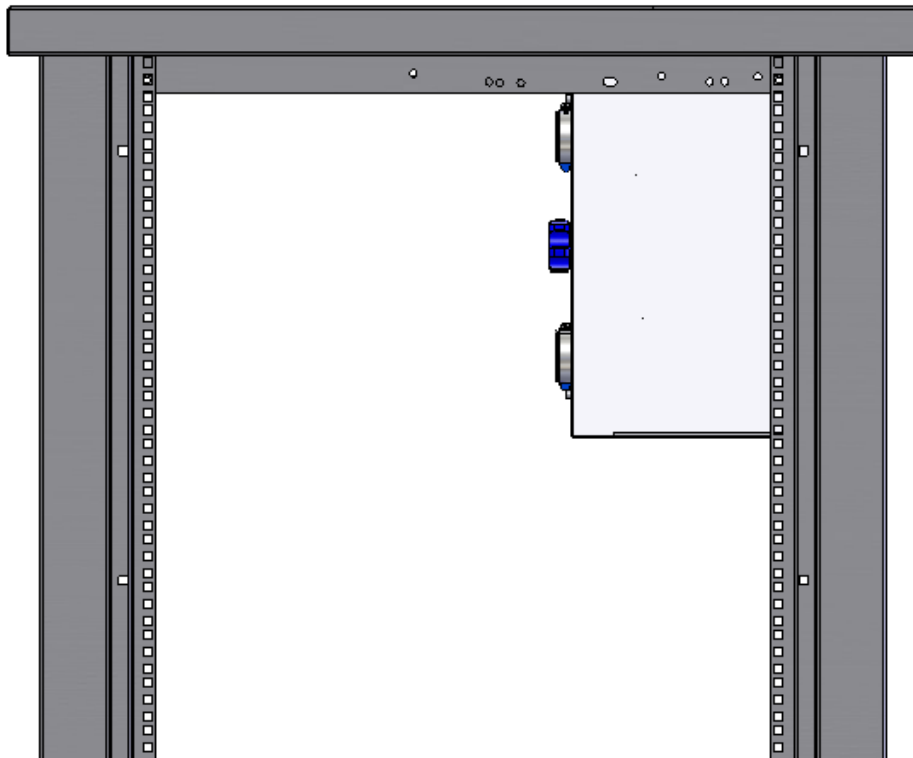


Flanges to weld

7/8"

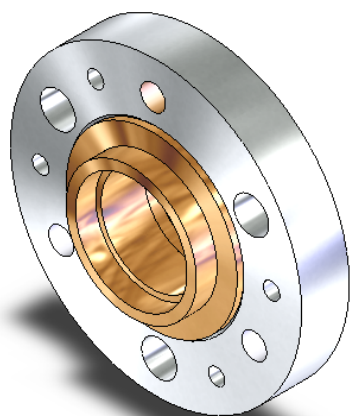


TECHNICAL DATA

Part Number	CNT78FLS78RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 7/8"
Impedance	50 Ω
Average power VHF	≤ 5 kW
Average power UHF	≤ 2.6 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / --
Weight	~ 0.17 Kg

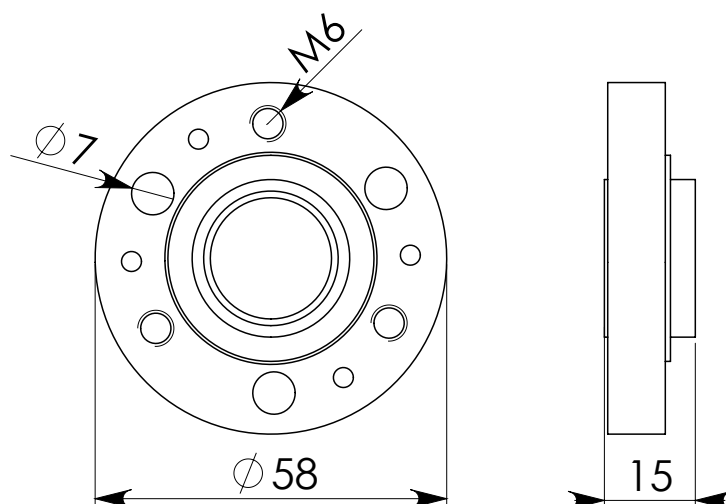


1+5/8"

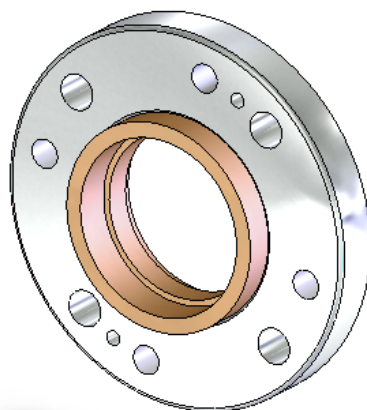


TECHNICAL DATA

Part Number	CNT58FLS58RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 1+5/8"
Impedance	50 Ω
Average power VHF	≤ 13 kW
Average power UHF	≤ 7 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Nickel plating
Corps / Treatment	Brass / --
Weight	~ 0.44 Kg

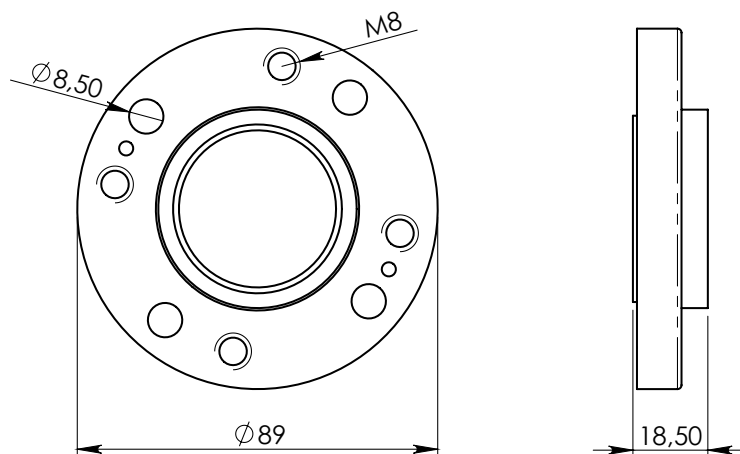


3+1/8"

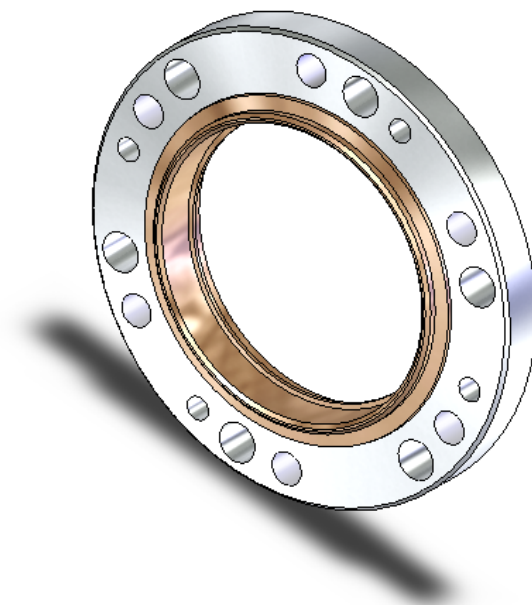


TECHNICAL DATA

Part Number	CNT18FLS18RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Bronze / --
Weight	~ 0.76 Kg

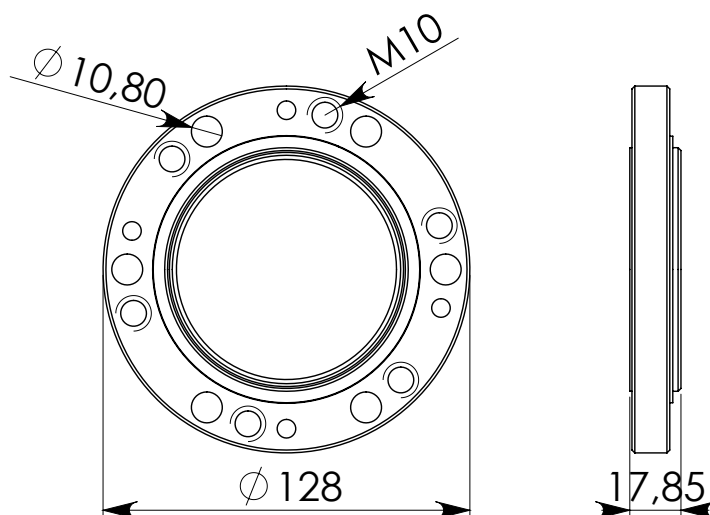


4+1/2"

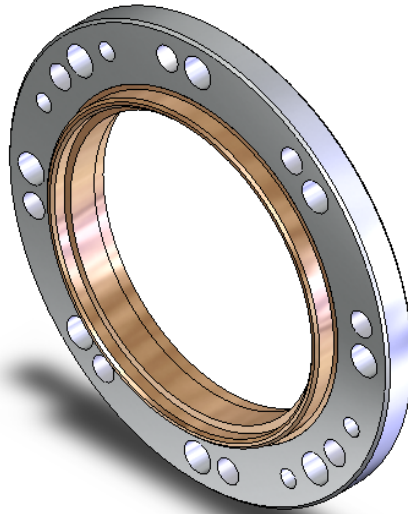


TECHNICAL DATA

Part Number	CNT12FLS12RL
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 4+1/2"
Impedance	50 Ω
Average power VHF	≤ 70 kW
Average power UHF	≤ 37 kW
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Bronze / Nickel plating
Corps / Treatment	Bronze / --
Weight	~ 1.04 Kg

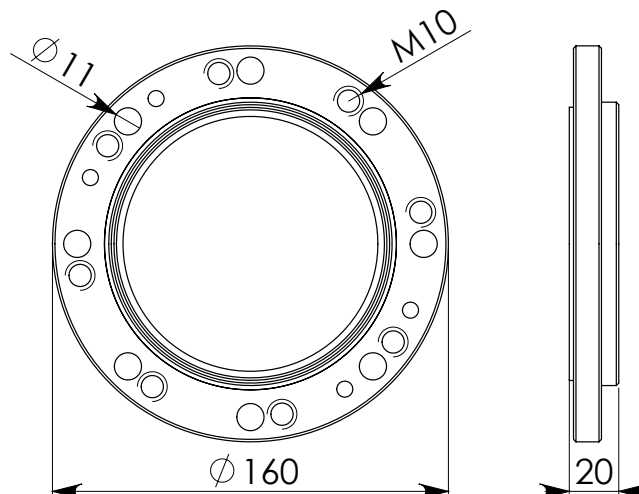


Connectors for RF Cable

7/8" EIA Flange for 1/2" foam cable

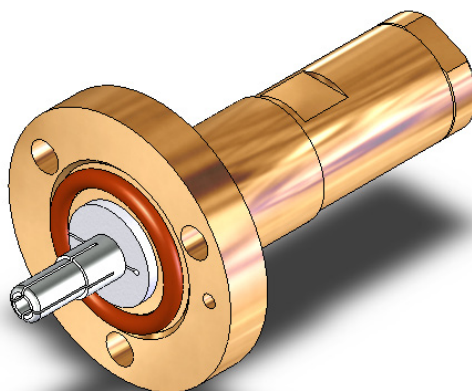


TECHNICAL DATA

Part Number	CNTFL8XCP
Frequency Range	DC ÷ 5 GHz
Connectors	EIA 7/8"
Impedance	50 Ω
Type of cable to use	1/2" Foam (All cable)
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Passivation
Corps / Treatment	Brass / Passivation
Inner / Treatment	Brass / Silver plated
Weight	~ 0.4 Kg

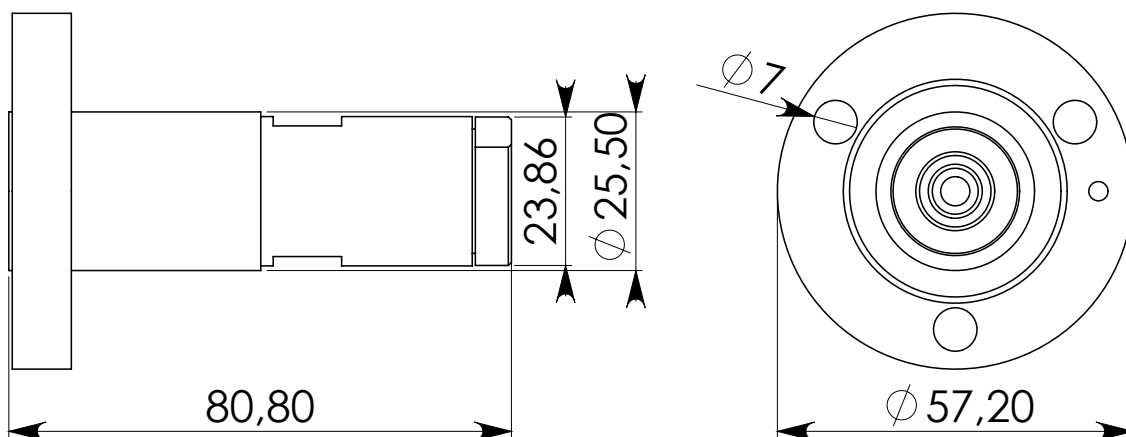


7/8" EIA Flange (90°) for 1/2" foam cable

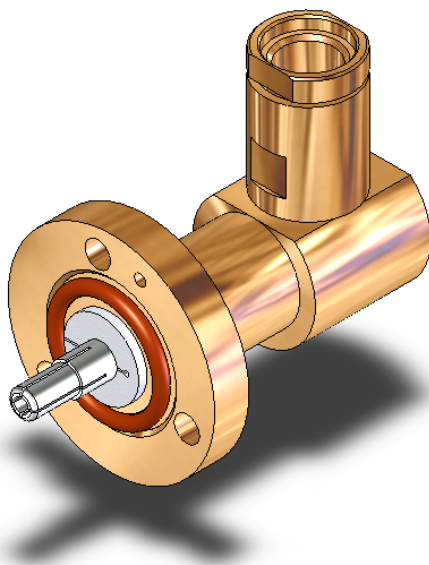


TECHNICAL DATA


Part Number	CNTFL8XCP90
Frequency Range	DC ÷ 5 Ghz
Connectors	EIA 7/8"
Impedance	50 Ω
Type of cable to use	1/2" Foam (All cable)
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Passivation
Corps / Treatment	Brass / Passivation
Inner / Treatment	Brass / Silver plated
Weight	~ 0.5 Kg

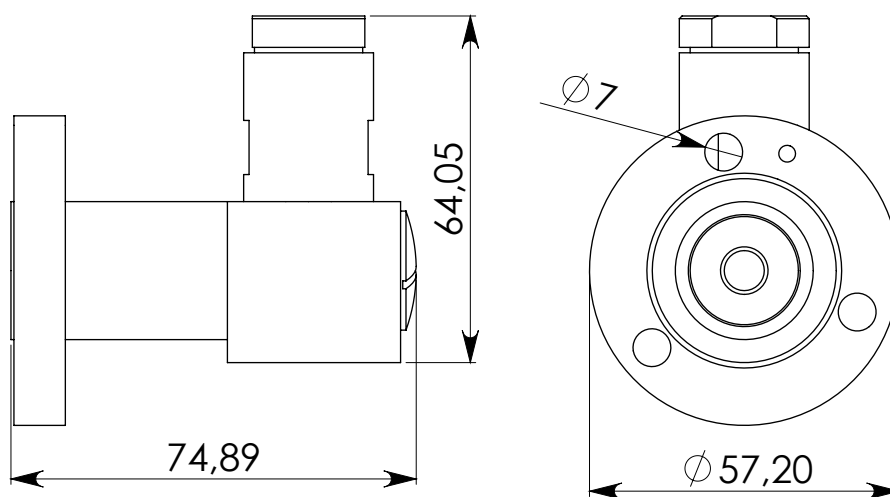


Specifications are subject to change without prior notice

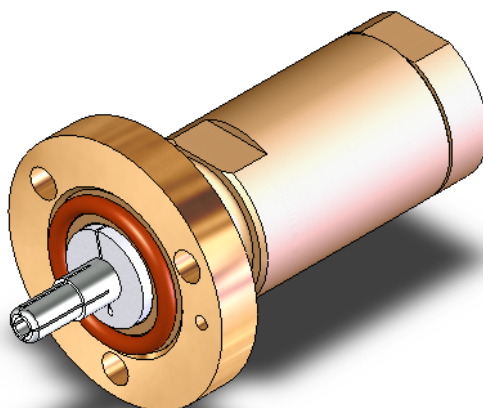
7/8" EIA Flange for 7/8" foam cable**TECHNICAL DATA**

Part Number	CNTFL8XC8
Frequency Range	DC ÷ 5 Ghz
Connectors	EIA 7/8"
Impedance	50 Ω
Type of cable to use	7/8" Foam (All cable)
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Passivation
Corps / Treatment	Brass / Passivation
Inner / Treatment	Brass / Silver plated
Weight	~ 0.5 Kg

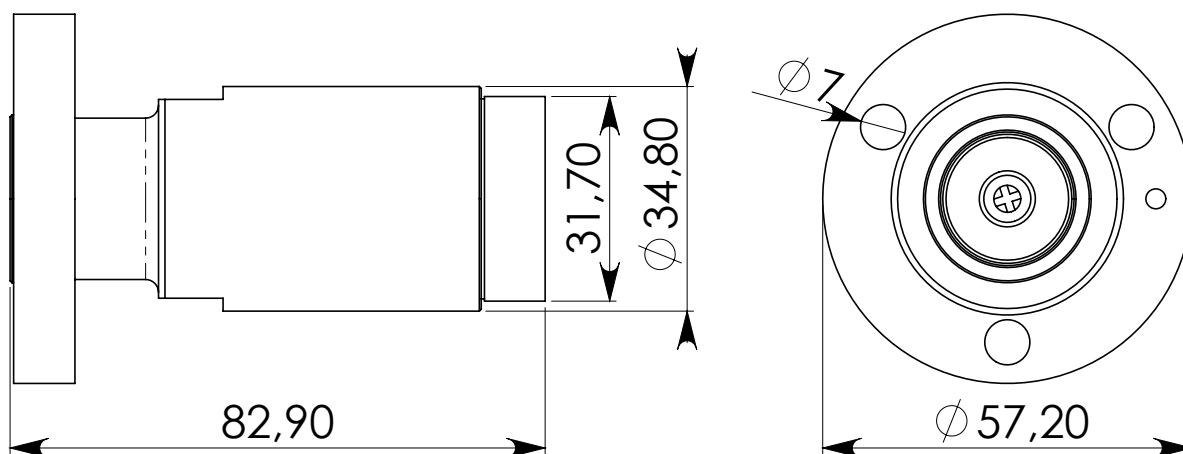

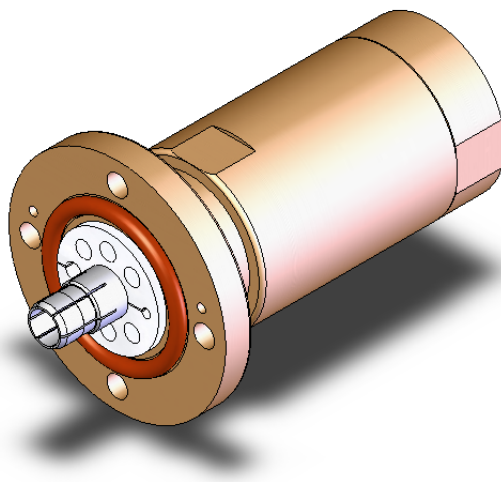
1+5/8" EIA Flange for 1+5/8" foam cable**TECHNICAL DATA**

Part Number	CNT58FLXC58
Frequency Range	DC ÷ 5 Ghz
Connectors	EIA 1+5/8" (All cable)
Impedance	50 Ω
Type of cable to use	1+5/8" Foam
Operating Temperature Range	-40 ÷ +70° C
Flange / Treatment	Brass / Passivation
Corps / Treatment	Brass / Passivation
Inner / Treatment	Brass / Silver plated
Weight	~ 1.6 Kg

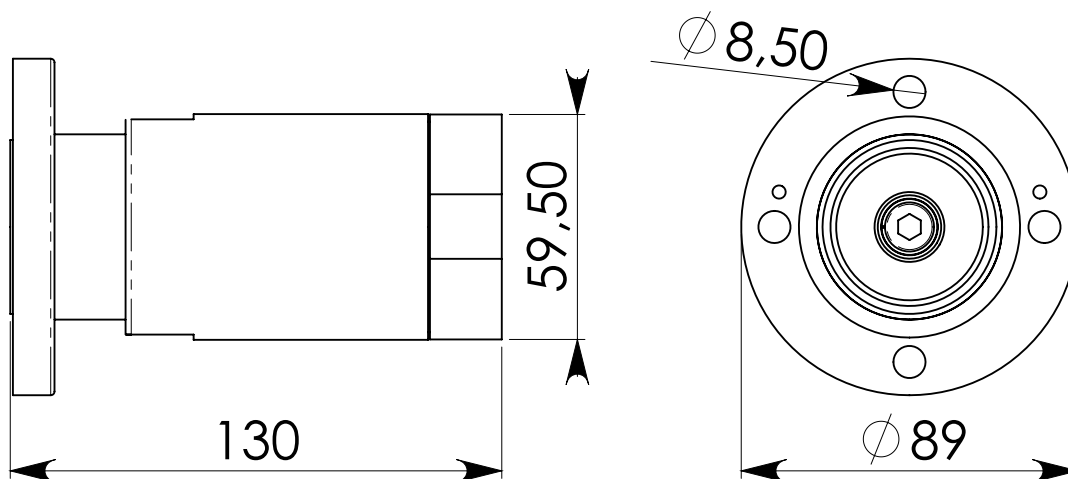



Straight Adaptors

3+1/8" Straight Adaptors (Coupling assembly with inner)

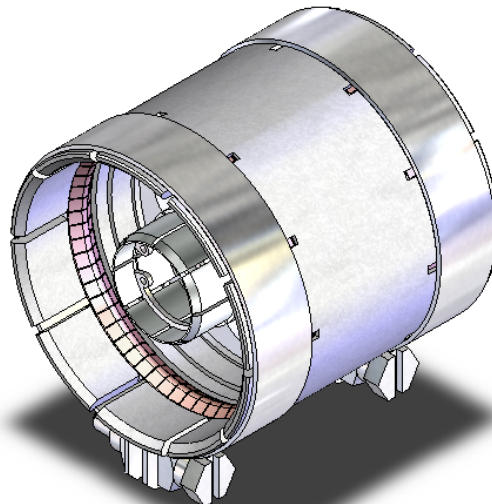


TECHNICAL DATA

Part Number	ADPGNTRL318
Frequency Range	0.1 ÷ 900 Mhz
Connectors	EIA 3+1/8"
Impedance	50 Ω
Average power VHF	≤ 35 kW
Average power UHF	≤ 22 kW
Operating Temperature Range	-40 ÷ +70° C
Inner / Treatment	Phosphor Bronze / Silver plated
Corps / Treatment	Aluminium / Alodine
Insulator	PTFE
Weight	~ 0.7 Kg

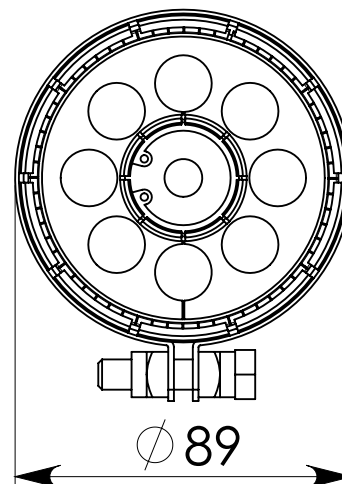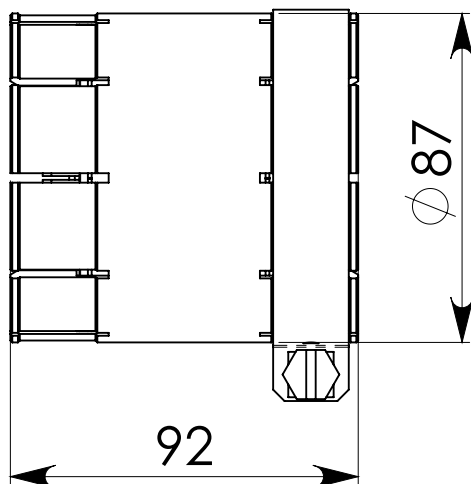

U-Link for Patch Panels


7/8"

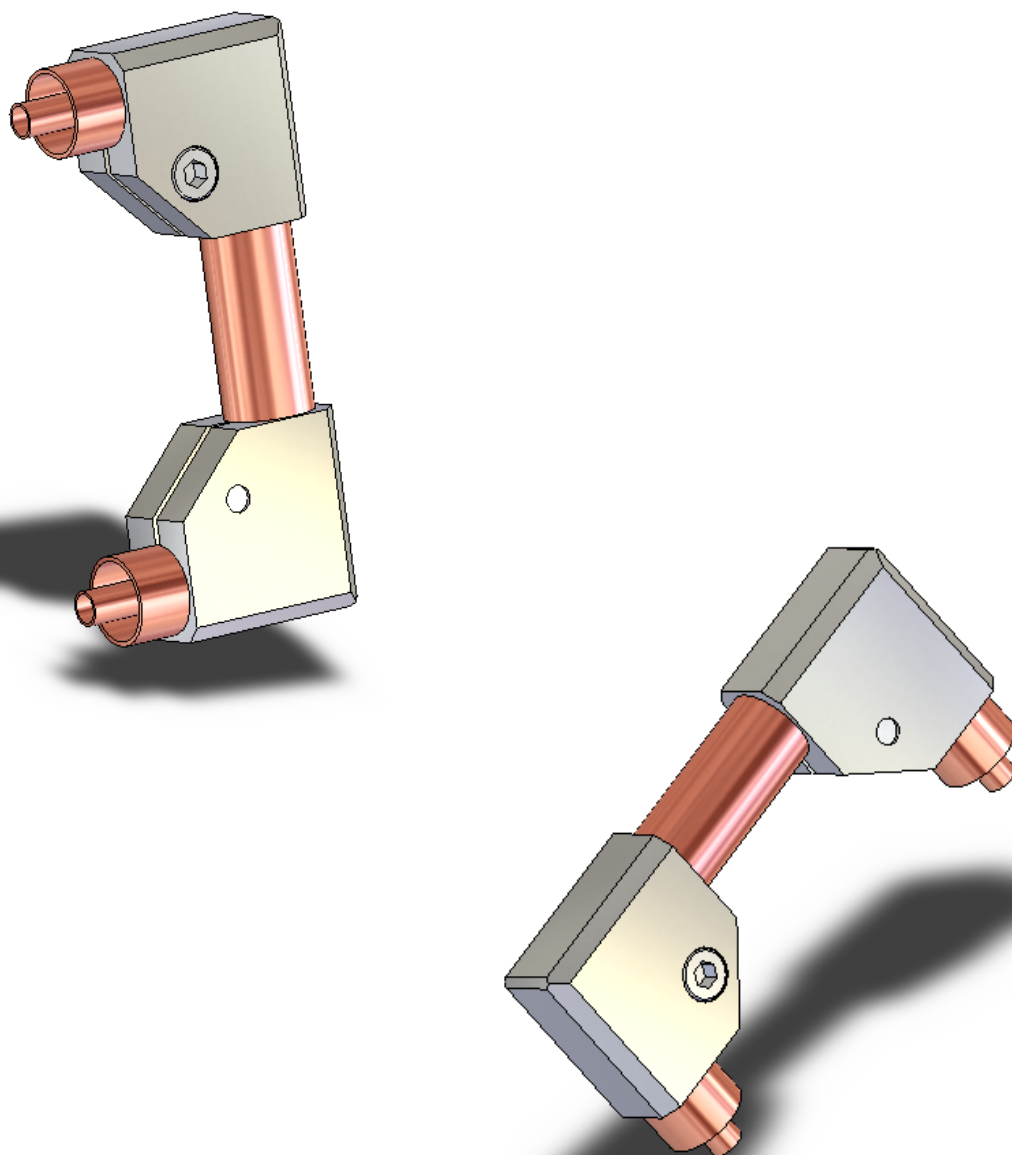

TECHNICAL DATA

Part Number	ULINK78
Frequency Range	0.1 ÷ 900 Mhz
Return Loss	> 30 dB
Impedance	50 Ω
Operating Temperature Range	-10 ÷ +50° C
Weight	~ 0.35 Kg


1+5/8"

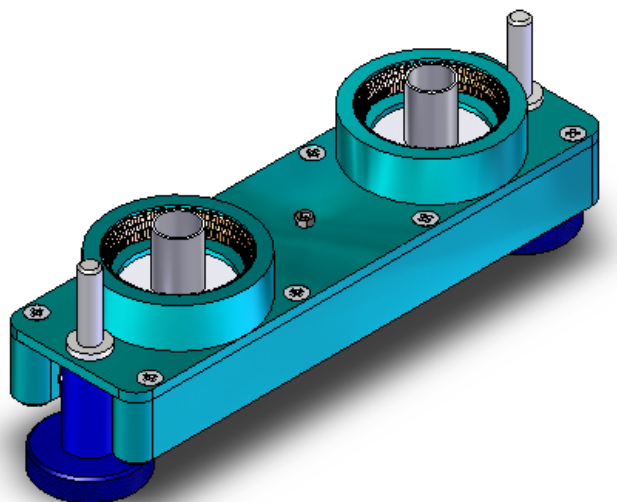

TECHNICAL DATA

Part Number	ULINK158
Frequency Range	0.1 ÷ 900 Mhz
Return Loss	> 30 dB
Impedance	50 Ω
Operating Temperature Range	-10 ÷ +50° C
Weight	~ 1.3 Kg


3+1/8"

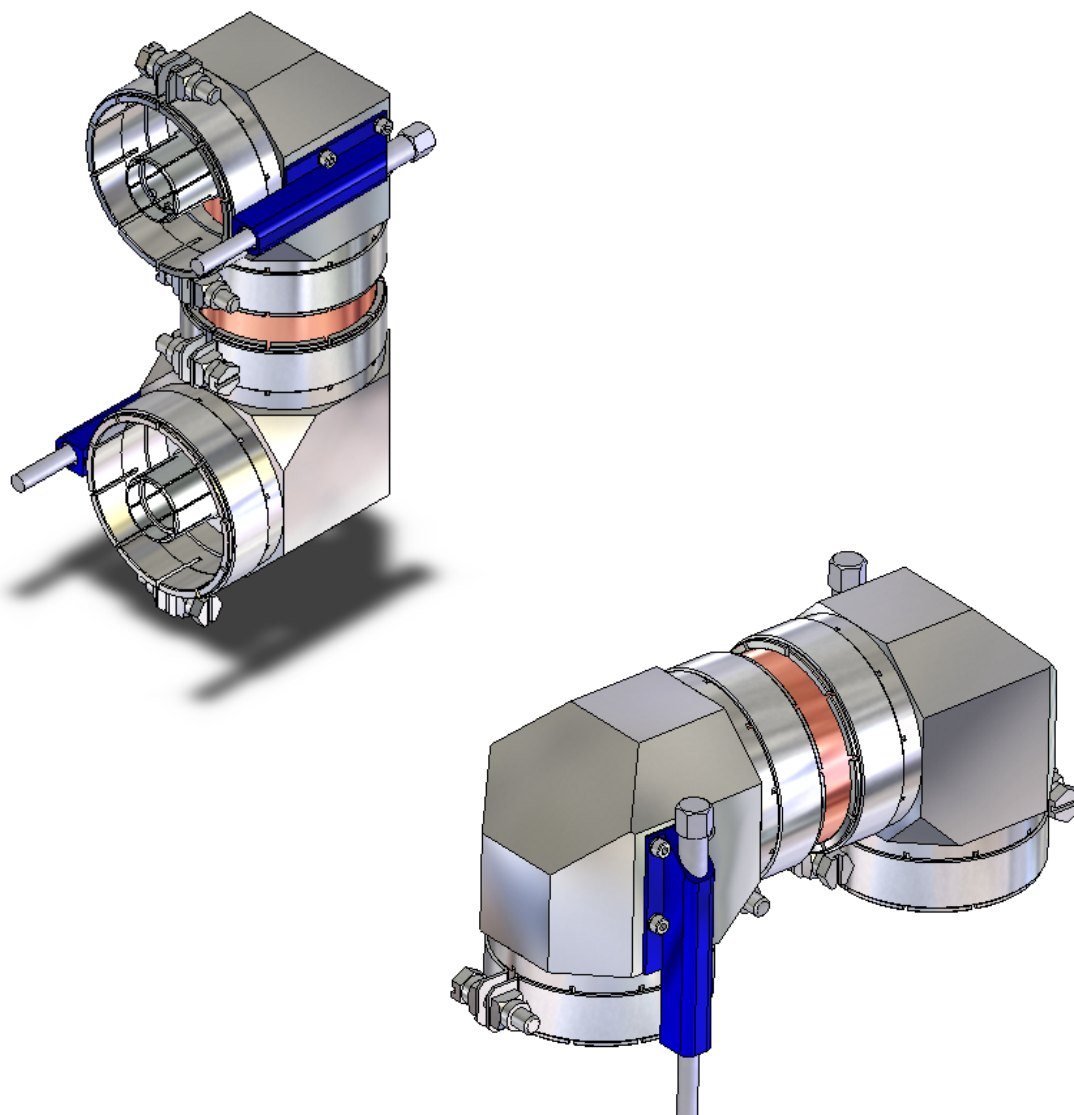

TECHNICAL DATA

Part Number	ULINK318
Frequency Range	0.1 ÷ 900 Mhz
Return Loss	> 30 dB
Impedance	50 Ω
Operating Temperature Range	-10 ÷ +50° C
Weight	~ 3.5 Kg


4+1/2"

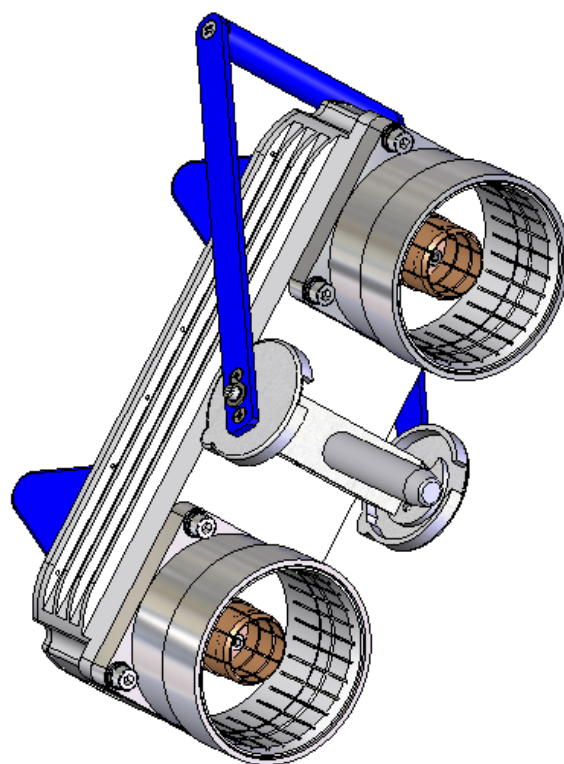

TECHNICAL DATA


Part Number	ULINK412
Frequency Range	0.1 ÷ 900 Mhz
Return Loss	> 30 dB
Impedance	50 Ω
Operating Temperature Range	-10 ÷ +50° C
Weight	~ 8.2 Kg

Patch Panels

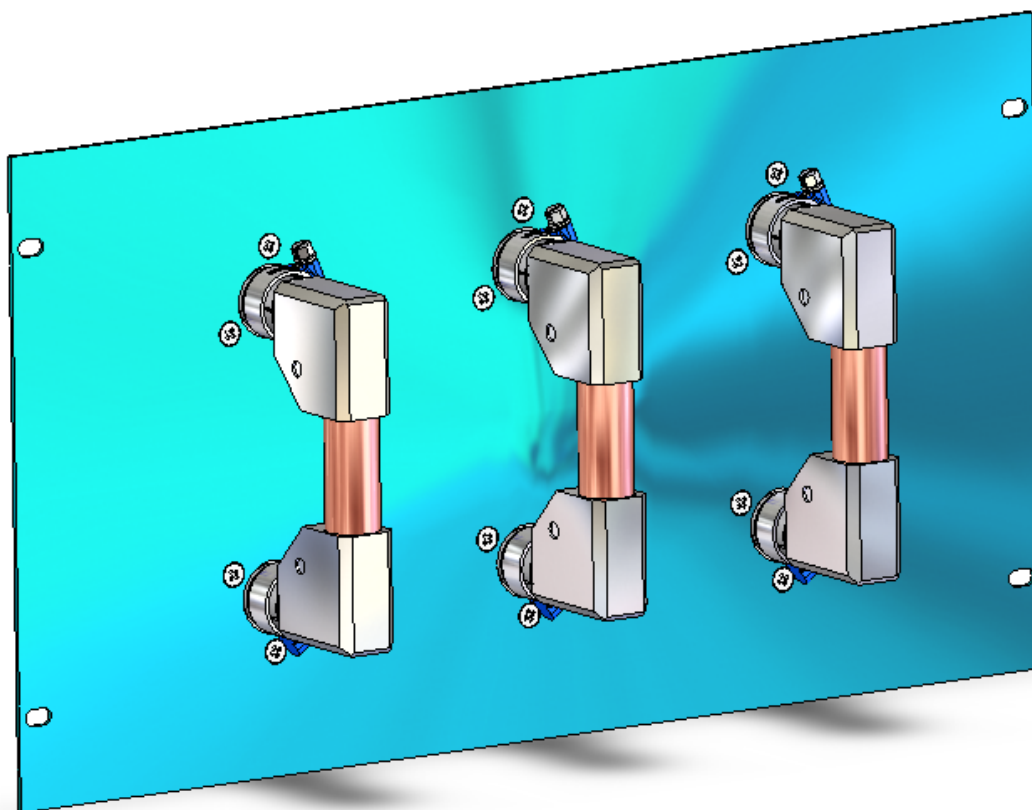7/8" six ports / three U-Links**TECHNICAL DATA**


Part Number	PCP6-6-3-78
Connector	EIA 7/8"
Ports	6
U-links	3
Dimensions	Standard 6 unit rack

Other models with different configurations are available on request

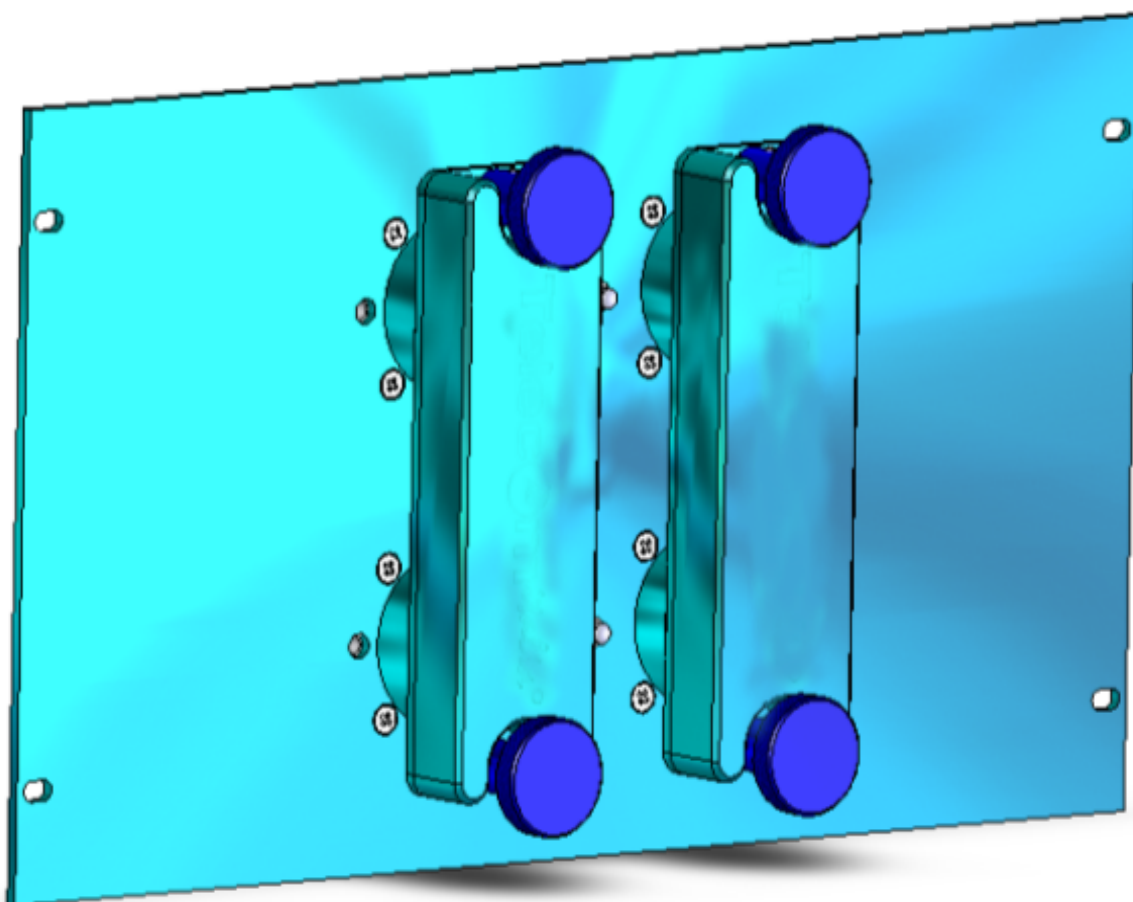1+5/8" four ports / two U-Links**TECHNICAL DATA**


Part Number	PCP6-4-2-58
Connector	EIA 1+5/8"
Ports	4
U-links	2
Dimensions	Standard 6 unit rack

Other models with different configurations are available on request

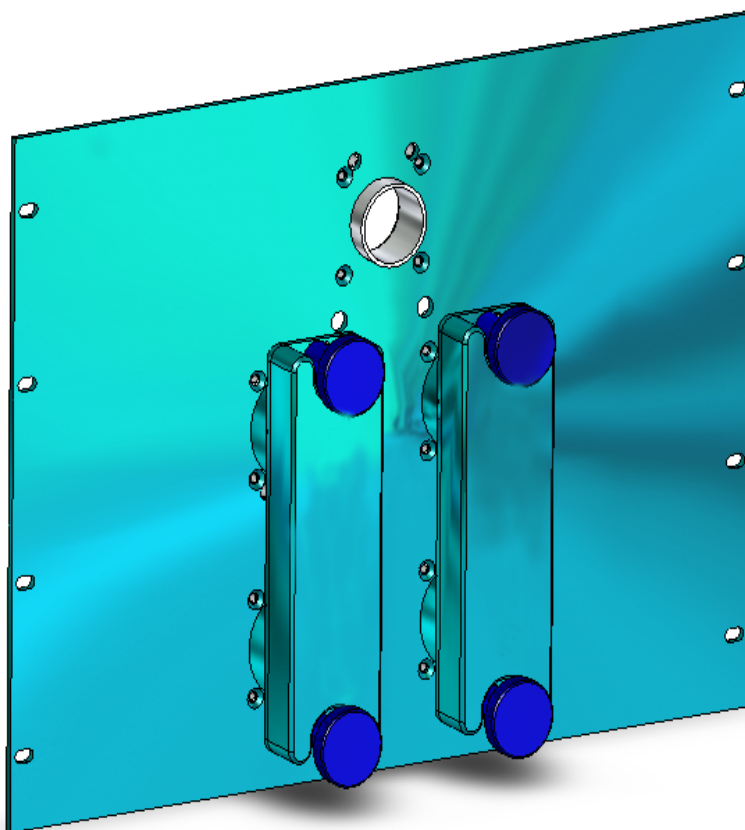1+5/8" five ports / two U-Links**TECHNICAL DATA**


Part Number	PCP8-5-2-58
Connector	EIA 1+5/8"
Ports	5
U-links	2
Dimensions	Standard 8 unit rack

Other models with different configurations are available on request

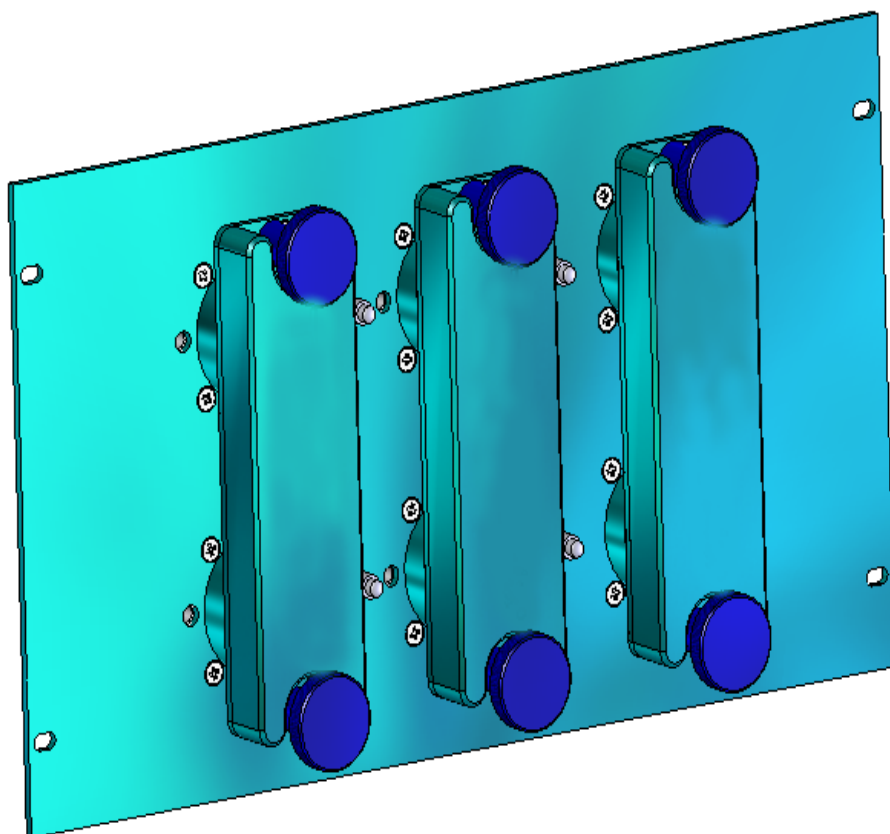1+5/8" six ports / three U-Links**TECHNICAL DATA**


Part Number	PCP6-6-3-58
Connector	EIA 1+5/8"
Ports	6
U-links	3
Dimensions	Standard 6 unit rack

Other models with different configurations are available on request

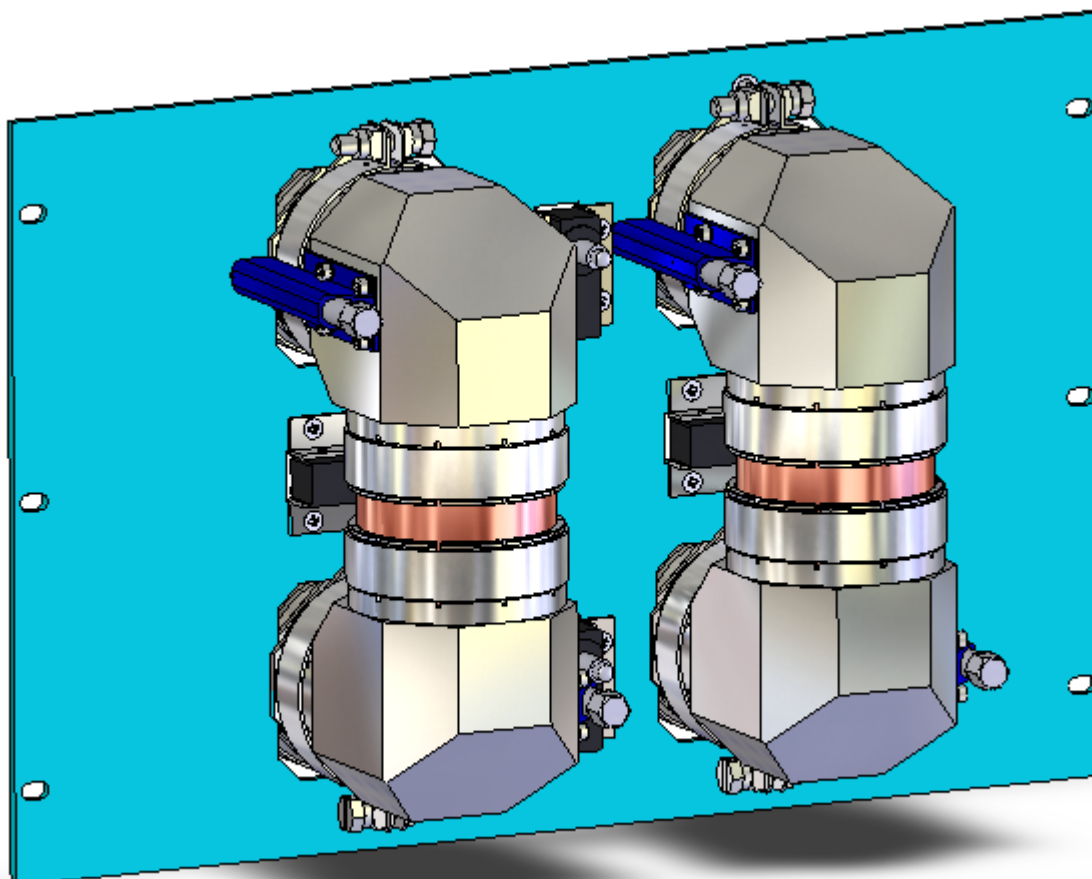3+1/8" four ports / two U-Links**TECHNICAL DATA**


Part Number	PCP7-4-2-318
Connector	EIA 3+1/8"
Ports	4
U-links	2
Dimensions	Standard 7 unit rack

Other models with different configurations are available on request

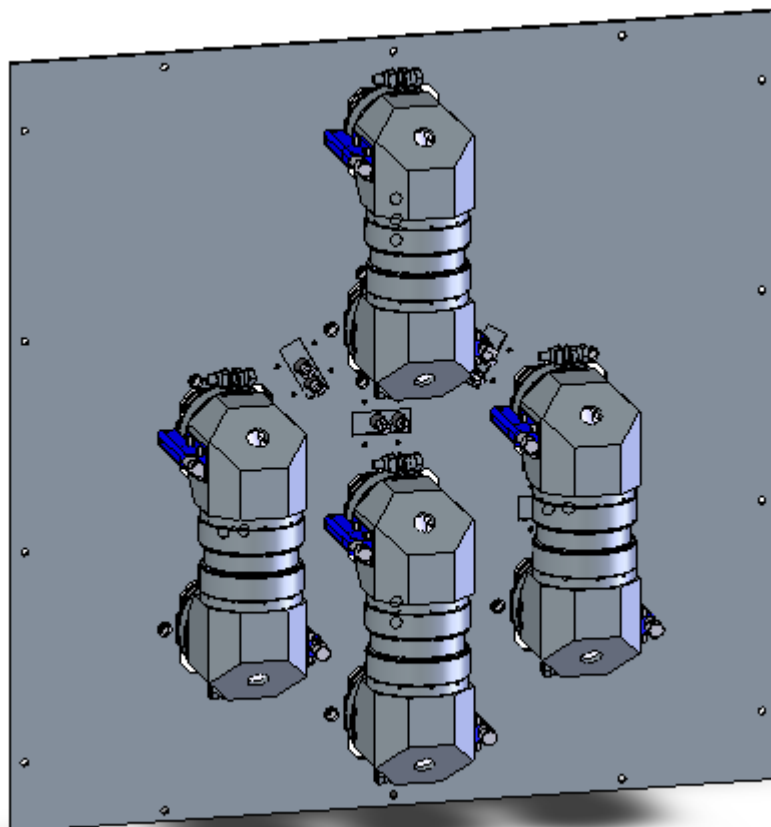3+1/8" eight ports / four U-Links**TECHNICAL DATA**

Part Number	PCP15-8-4-318
Connector	EIA 3+1/8"
Ports	8
U-links	4
Dimensions	670 mm (W) x 672 mm (H)

Other models with different configurations are available on request

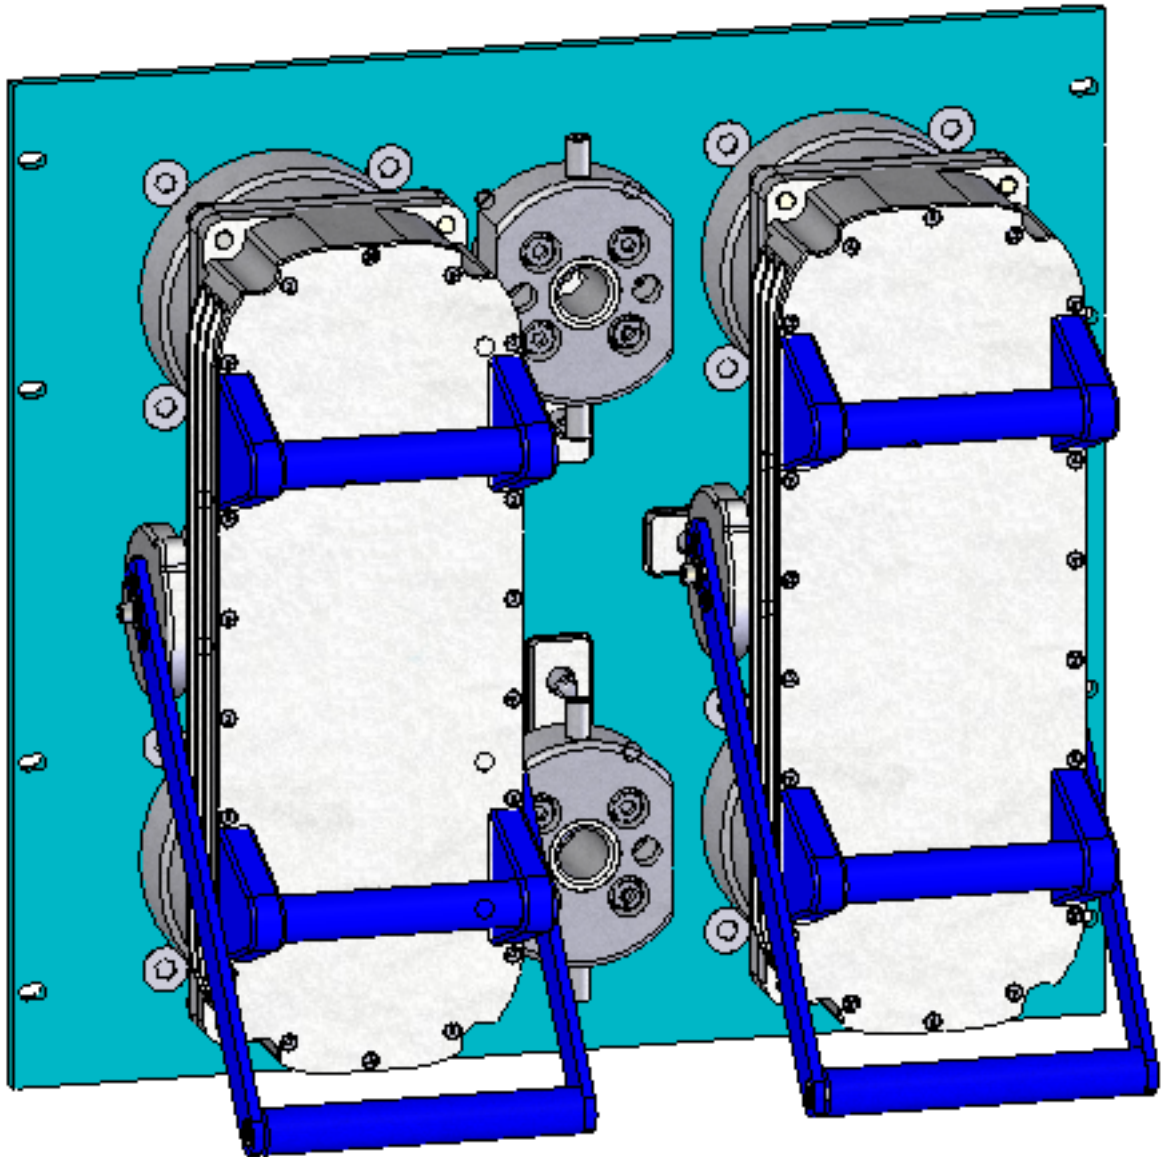

Dimensions

Standard 10 unit rack

Other models with different configurations are available on request

TELECOMUNICAZIONI FERRARA SRL
WWW.TELECFE.IT

