

RG213 (RG213 COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	6.2	1000
200	8.8	700
500	14.0	400
1000	26.3	230

*Average values



RG214 (RG214 COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	7.5	800
200	11	550
500	17	350
1000	29	200

*Average values



RG218 (RG218 COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	3	3500
200	5	2300
500	8	1300
1000	14.5	780

*Average values



"These specifications are subject to change without notice"

CLX1/4" (foam 1/4" COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	4.5	1500
200	6	1200
500	10	700
1000	15	500

*Average values



CLX1/2" (foam 1/2" COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	2.3	3400
200	3.3	2000
500	5	1400
1000	7	900


*Average values



CLX7/8" (foam 7/8" COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	1.2	7500
200	1.8	5200
500	3	3000
1000	4.5	1500

*Average values

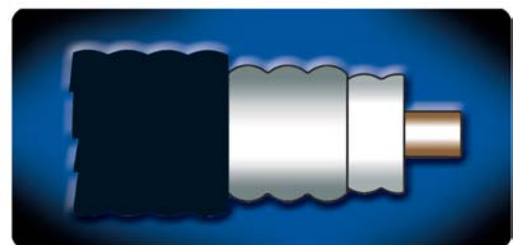


"These specifications are subject to change without notice"

CLX1+5/8" (air 1+5/8" COAXIAL CABLE)

F (MHz)	Attenuation* (dB/100m)	Maximum Average Power Rating* (W)
100	0.7	15000
200	0.9	11000
500	1.5	6500
1000	2.3	4200

*Average values

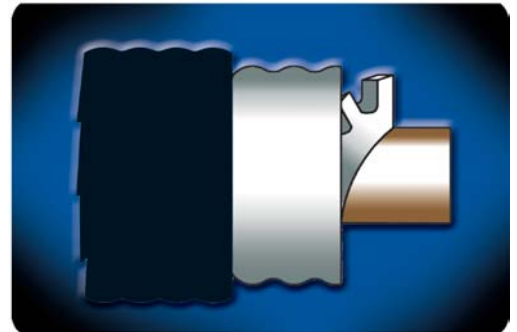

"These specifications are subject to change without notice"